C390b

19A442

A273
Wireless interface module

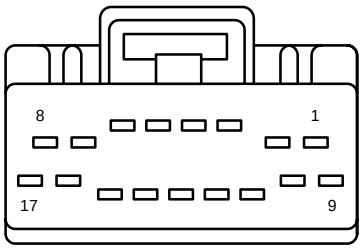

F17005

Pin	Circuit	Circuit Function
1	713 (WH)	Microphone, Ground
2	714 (VT)	Microphone, audio
3	–	not used
4	728 (WH/OG)	On button
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used

Pin	Circuit	Circuit Function
10	725 (PK)	Radio, to cellular phone, audio +
11	724 (LB/YE)	Radio, to cellular phone, audio –
12	723 (GY/RD)	Cellular phone, wake up
13	–	not used
14	–	not used
15	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
16	694 (BK/LG)	Ground
17	720 (RD/YE)	Voltage supplied at all times (overload protected)

C392

14A005

N316
Inertia Fuel Shutoff (IFS) switch



F03032

Pin	Circuit	Circuit Function
1	787 (PK/BK)	Fuel pump, Power
2	787 (PK/BK)	Fuel pump, Power
3	–	not used

C393 (BK)

14N000

N449
Adjustable pedal switch



F07055

Pin	Circuit	Circuit Function
1	1492 (LB/RD)	memory, Adjustable pedal switch, rearward
2	490 (RD)	Voltage supplied at all times (overload protected)
3	57 (BK)	Ground
4	–	not used
5	–	not used
6	57 (BK)	Ground
7	1493 (PK/BK)	memory, Adjustable pedal switch, Forward