Power seat switch, left, Executive, limousine

Schematic

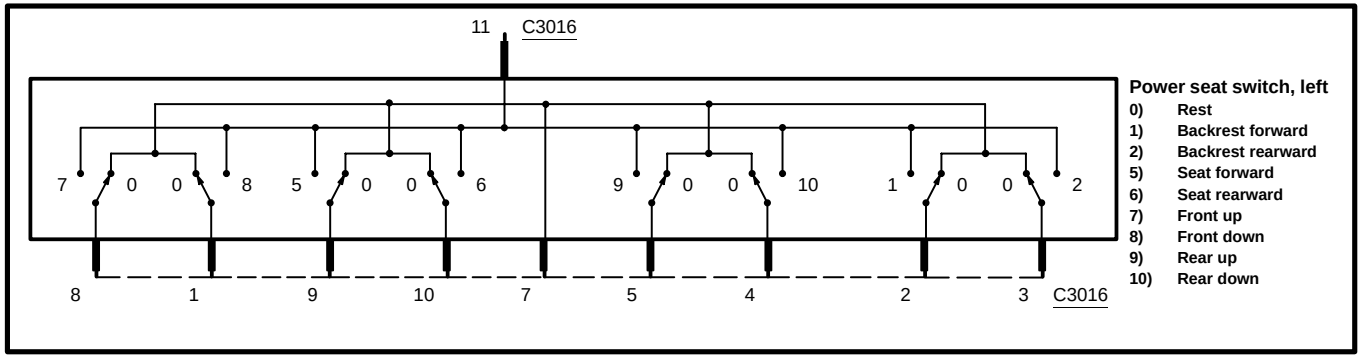

Terminals

C3016

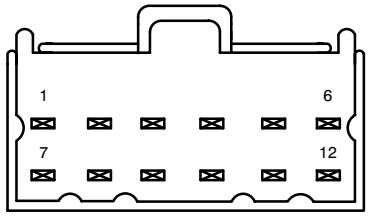

F12019

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	7 and 1, 2, 3, 4, 5, 8, 9, 10	Rest	Closed circuit
	11 and 1, 2, 3, 4, 5, 7, 8, 9, 10	Rest	Open circuit
Front height circuit	11 and 1	Down	Closed circuit
	8 and 7	Down	Closed circuit
	11 and 8	Up	Closed circuit
	1 and 7	Up	Closed circuit
Rear height circuit	11 and 4	Down	Closed circuit
	5 and 7	Down	Closed circuit
	11 and 5	Up	Closed circuit
	4 and 7	Up	Closed circuit
Forward/rearward circuit	11 and 10	Rearward	Closed circuit
	9 and 7	Rearward	Closed circuit
	11 and 9	Forward	Closed circuit
	10 and 7	Forward	Closed circuit
Backrest circuit	11 and 3	Rearward	Closed circuit
	2 and 7	Rearward	Closed circuit
	11 and 2	Forward	Closed circuit
	3 and 7	Forward	Closed circuit