Power seat switch, 8–way power seat

Schematic

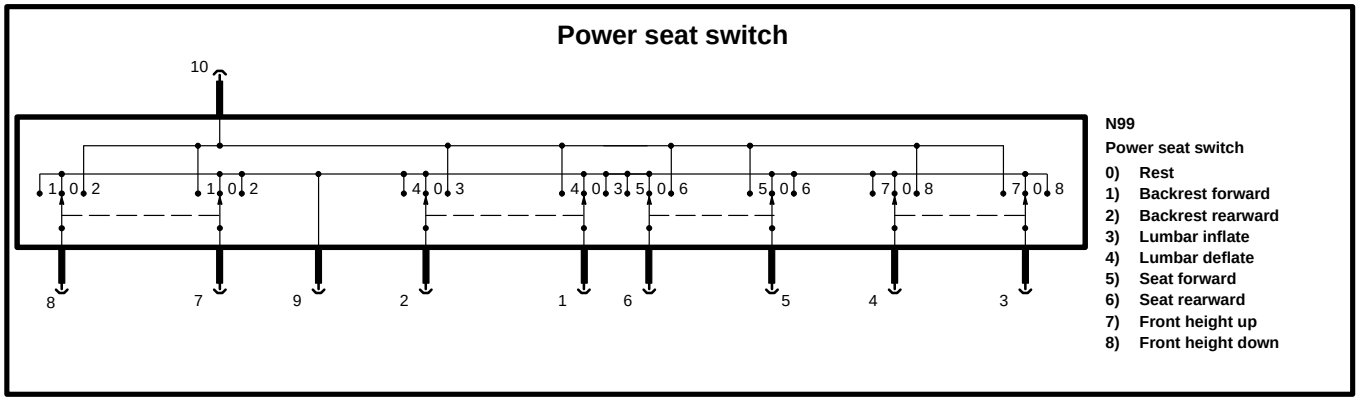

Terminal locations

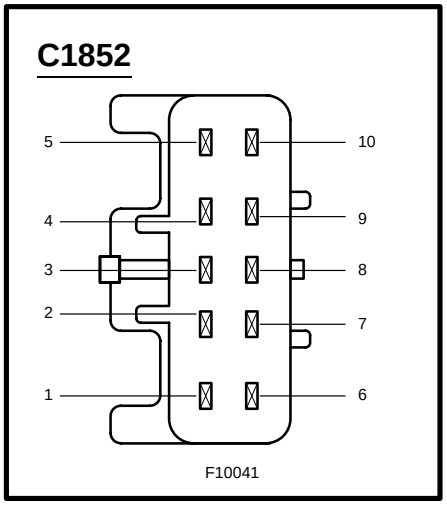

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Backrest circuit	8 and 10	Rest	Open circuit
		Backrest forward	Open circuit
		Backrest rearward	Closed circuit
	7 and 10	Rest	Open circuit
		Backrest forward	Closed circuit
		Backrest rearward	Open circuit
	7 and 9	Rest	Closed circuit
		Backrest forward	Open circuit
		Backrest rearward	Closed circuit
	8 and 9	Rest	Closed circuit
		Backrest forward	Closed circuit
		Backrest rearward	Open circuit