Adjustable pedal switch – without memory

Schematic

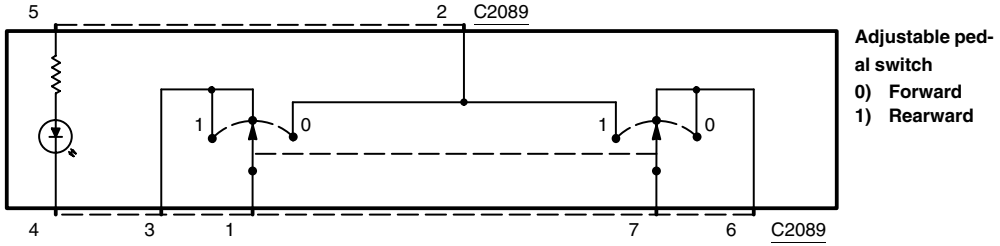

Terminals

C2089



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Forward/rearward circuit	1 and 2	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	1 and 3	Forward	Open circuit
		Rest	Closed circuit
		Rearward	
	7 and 2	Forward	Open circuit
		Rest	
		Rearward	Closed circuit
	7 and 6	Forward	Closed circuit
		Rest	
		Rearward	Open circuit