C4211b

14A005

Navigation system amplifier

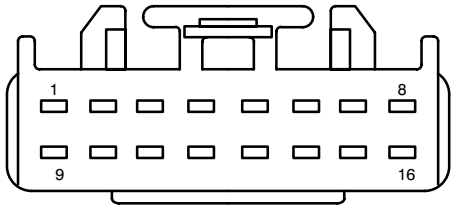

F16029

Pin	Circuit	Circuit function
1	805 (WH/LG)	Speaker, right front (18808) +
2	811 (DG/OG)	Speaker, right front (18808) –
3	804 (OG/LG)	Speaker, left front (18808) +
4	813 (LB/WH)	Speaker, left front (18808) –
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	803 (BN/PK)	Speaker, right rear (18808) –
10	802 (OG/RD)	Speaker, right rear (18808) +
11	800 (GY/LB)	Speaker, left rear (18808) +
12	801 (TN/YE)	Speaker, left rear (18808) –
13	287 (BK/WH)	Subwoofer –
14	822 (BK/LG)	Subwoofer +
15	288 (VT)	Subwoofer –
16	823 (LG)	Subwoofer +

C4212

14A005

Subwoofer



F04271

Pin	Circuit	Circuit function
1	823 (LG)	Subwoofer +
2	288 (VT)	Subwoofer –
3	822 (BK/LG)	Subwoofer +
4	287 (BK/WH)	Subwoofer –

C4221a

14A005

Isolator/radio antenna module



F02433

Pin	Circuit	Circuit function
1	1389 (WH)	Rear window defrost, feed
2	187 (DB/OG)	Rear window defrost relay, switched power

C4221b

14A005

Isolator/radio antenna module



F02433

Pin	Circuit	Circuit function
1	186 (BN/LB)	Electronic Hidden Antenna Module (EHAM), Power, feed
2	1523 (DG)	Fused accessory relay, switched power, output