C290a

14401

A11
Radio

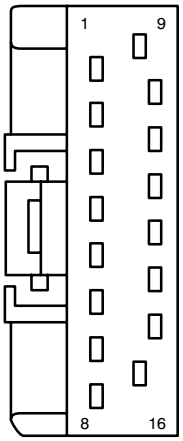

F16071

Pin	Circuit	Circuit Function
1	235 (RD/BK)	Instrument illumination, input
	19 (LB/RD)	Radio Illumination, input
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear +
6	803 (BN/PK)	Speaker, right rear –
7	805 (WH/LG)	Speaker, right front +
8	811 (DG/OG)	Speaker, right front –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear +
13	801 (TN/YE)	Speaker, left rear –
14	804 (OG/LG)	Speaker, left front +
15	813 (LB/WH)	Speaker, left front –
16	694 (BK/LG)	Ground

C290b

14401

A11
Radio



F08185

Pin	Circuit	Circuit Function
1	168 (RD/BK)	RX, signal
2	167 (BN/OG)	TX, signal
3	57 (BK)	Ground
4	173 (DG/VT)	Radio - Subwoofer, High, mute
5	–	not used
6	–	not used
7	–	not used
8	–	not used