Power seat switch, left – Navigator

Schematic

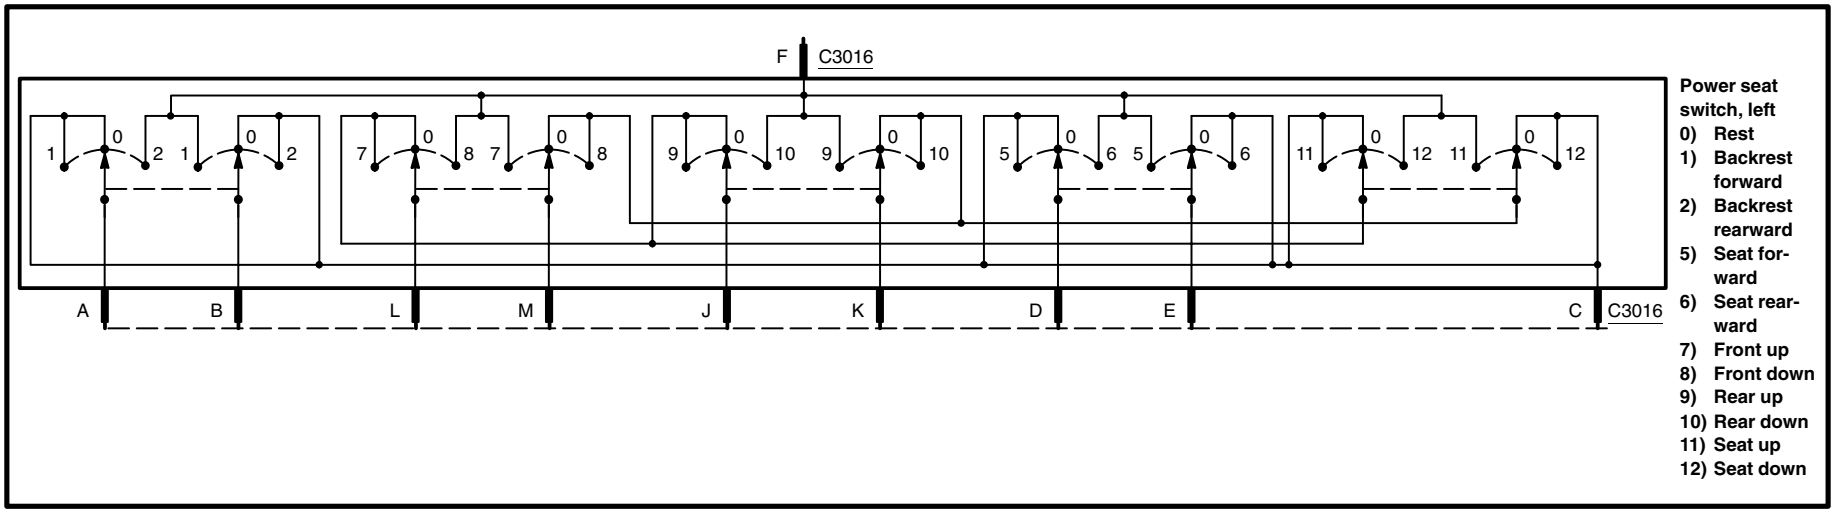

Terminals

C3016

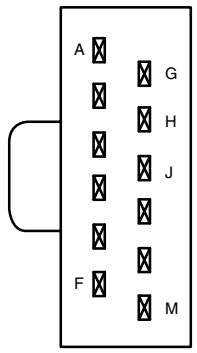

F12171

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Backrest circuit	F and B	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	F and A	Forward	Open circuit
		Rest	
		Rearward	Closed circuit
	C and B	Forward	Open circuit
		Rest	Closed circuit
		Rearward	
	C and A	Forward	Closed circuit
		Rest	
		Rearward	Open circuit