Seat heater switch, passenger side

Schematic

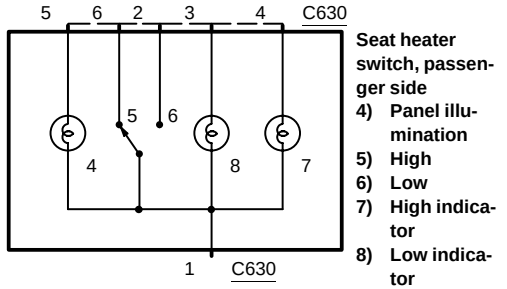

Seat heater switch, passenger side

4) Panel illumination
5) High
6) Low
7) High indicator
8) Low indicator

Terminals

C630



F06301

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
heater Circuit	1 and 6	High	Closed circuit
		Low	Open circuit
	1 and 2	High	Open circuit
		Low	Closed circuit