-110

C1013

14K733

K26
Fog lamp relay

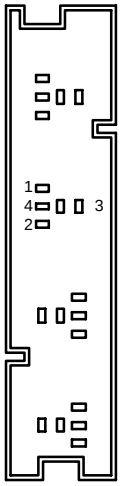

F20012

Pin	Circuit	Circuit Function
1	15S-LD8 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	91-LD8 (BK/OG)	Ground
3	15S-LD9 (GN/BK)	Voltage, ignition switch in Start or Run (not overload protected), switched
4	–	not used
5	15S-LD1 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switched

C1014

14K733

K132
Stoplamp relay

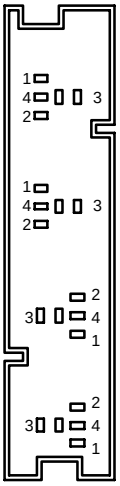

F20012

Pin	Circuit	Circuit Function
1	15-CF58 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
2	31S-CF71 (BK/BU)	Ground, switched
3	15S-CF58A (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-CF58 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
4	15S-LG14A (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected), switched
5	–	not used