Ignition switch (11572)

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Supplied by body builder, prove–out	P2 and GND	Accessory	Open circuit
		Lock	Open circuit
		Off	Open circuit
		Run	Open circuit
		Start	Closed circuit
prove–out	GND and P1	Accessory	Open circuit
		Lock	Open circuit
		Off	Open circuit
		Run	Open circuit
		Start	Closed circuit
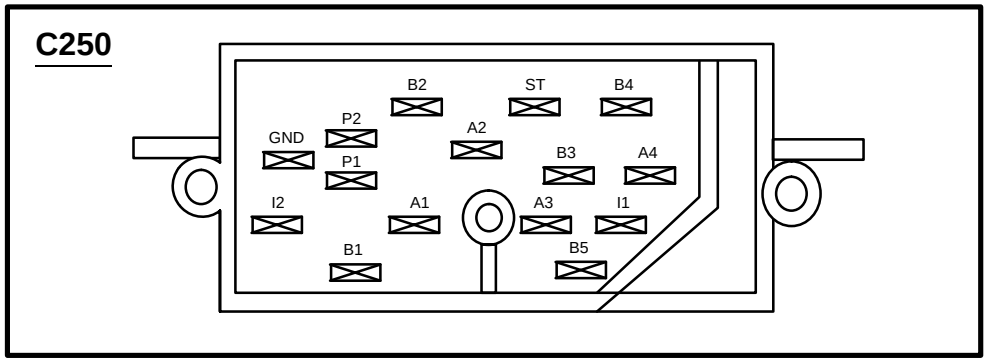
Terminals