C221

14334

Microphone



F03144

Pin	Circuit	Circuit function
1	714 (VT)	Microphone, audio
2	48	Shield
3	715 (LG)	Microphone, Ground

C239 (GY)

14A348 / 14A005

Trailer electronic brake control module



F06089

Pin	Circuit	Circuit function
1	–	not used
2	14 (BN)	Power, Exterior lamps
3	206 (WH)	Ground
4	50 (RD)	Voltage supplied at all times (overload protected electronic module)
5	511 (LG)	Brake pedal position switch (13480), to stoplamps
6	43 (DB)	Electric trailer brakes

C250 (BK)

14401

Ignition switch (11572)

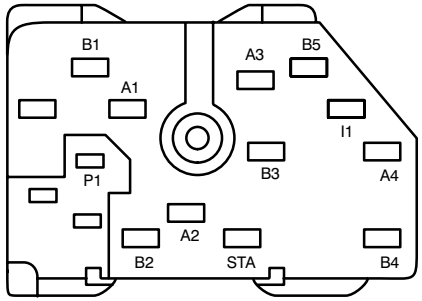

F15009

Pin	Circuit	Circuit function
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
A2	–	not used
A3	37 (YE)	Voltage in Run (overload protected)
A4	–	not used
B1	1118 (RD)	Voltage supplied at all times (overload protected)
B2	–	not used
B3	1118 (RD)	Voltage supplied at all times (overload protected)
B4	1050 (LG/VT)	Voltage supplied at all times (overload protected)
B5	1050 (LG/VT)	Voltage supplied at all times (overload protected)
I1	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
P1	–	not used
P2	–	not used
STA	1522 (DG)	Voltage: Ignition switch in Start