## C1168

12A581

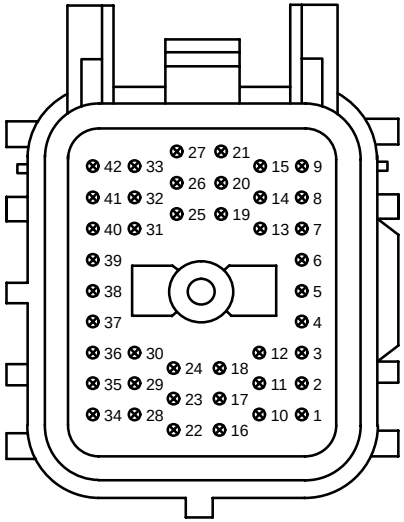


F42001

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| (1) | 35 (TN/YE) | (12) | 1087 (OG) | (23) | | (33) | 796 (LB) |
| (2) | 555 (TN) | (13) | 1086 (VT/OG) | (24) | 361 (RD) | (34) | |
| (3) | 556 (WH) | (14) | 1291 (RD/YE) | (25) | 552 (YE/RD) | (35) | 16 (YE/WH) |
| (4) | 561 (TN/RD) | (15) | 48 | (26) | | (36) | 904 (LG/RD) |
| (5) | 557 (BN/YE) | (16) | | (27) | | (37) | 1280 (GY/RD) |
| (6) | 558 (BN/LB) | (17) | 354 (LG/RD) | (28) | | (38) | |
| (7) | 559 (TN/BK) | (18) | | (29) | 676 (PK/OG) | (39) | 795 (DG) |
| (8) | 560 (LG/OG) | (19) | 359 (GY/RD) | (30) | 31 (WH/RD) | (40) | 795 (DG) |
| (9) | | (20) | | (31) | 39 (RD/WH) | (41) | 1277 (WH/LG) |
| (10) | 562 (LB) | (21) | 351 (BN/WH) | (32) | 48 | (42) | |
| (11) | 878 (PK/YE) | (22) | 812 (DB/LG) | | | | |

## C1171

### 13K027

K370
Daytime Running Lamps (DRL)
relay 1




F05123

| Pin | Circuit | Circuit function |
|---|---|---|
| 30 | 13 (RD/BK) | Power, Hot with Low Beams on |
| 85 | 196 (DB/OG) | Voltage supplied at all times (overload protected) |
| 86 | 57 (BK) | Ground |
| 87 | 471 (OG/LG) | Daytime running lamps resistor, to, Headlamp relay |
| 87A | 1033 (RD/YE) | Daytime Running Lamps (DRL) relay, Relay, switched power |

## C1172

### 13K027

K371
Daytime Running
Lamps (DRL) relay 2




F05109

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 15 (RD/YE) | Power, Hot with Headlamps on |
| 2 | 57 (BK) | Ground |
| 3 | 295 (LB/PK) | Voltage in Run (overload protected) |
| 4 | 196 (DB/OG) | Voltage supplied at all times (overload protected) |
| 5 | – | not used |