Power window switch, driver

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	4 and 2 – C504b	All Eight Window Switches (all positions)	Closed circuit
	2 – C504b and 2 – C504a	All Eight Window Switches (at rest)	Closed circuit
	6, 7, 4, 3 – C504a and 2 – C504a		
	5, 6, 3 – C504b and 2 – C504a		
Left front window circuit	4 – C504b and 6 – C504a	Up	Closed circuit
	4 – C504b and 7 – C504a	Down	Closed circuit
Right front window circuit	4 – C504b and 4 – C504a	Up	Closed circuit
	4 – C504b and 3 – C504a	Down	Closed circuit
Left rear window circuit	4 – C504b and 5 – C504b	Down	Closed circuit
	4 – C504b and 6 – C504b	Up	Closed circuit
Right rear window circuit	4 – C504b and 3 – C504b	Down	Closed circuit
	4 – C504b and 2 – C504a	Up	Closed circuit
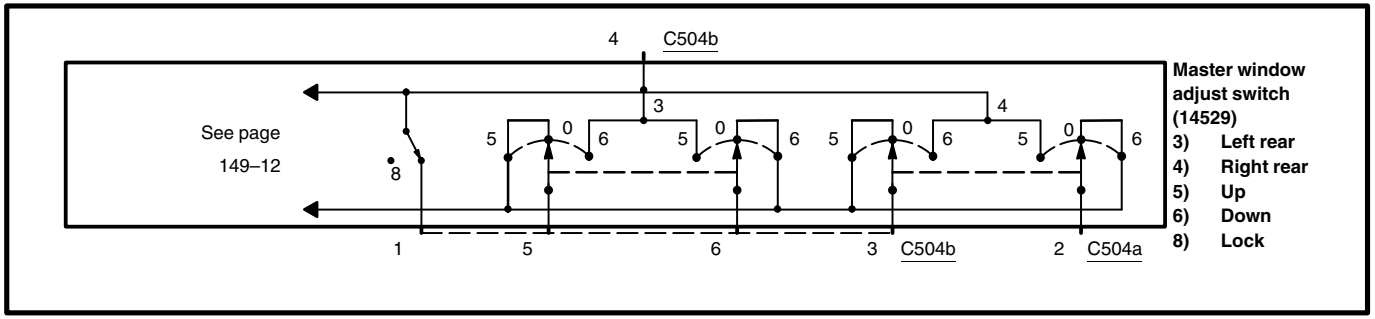
Schematic