Headlamp switch, Exterior lamps

Schematic

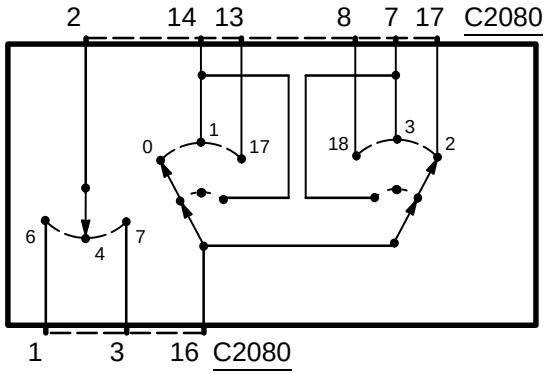

Light switch
0) Off
1) Park
2) Low beam
3) High beam
4) Neutral
6) LH turn signal
7) RH turn signal
17) Head
18) Flash to pass

Terminals

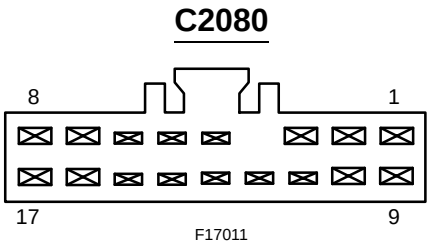

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Headlamp	13 and 16	Off	Open circuit
		Head	Closed circuit
		Park	Open circuit
Park lamps	14 and 16	Off	Open circuit
		Head	Closed circuit
		Park	Closed circuit
Turn signal	2 and 3	Left turn	Open circuit
	2 and 1	Left turn	Closed circuit
	2 and 1	Right turn	Open circuit
	2 and 3	Right turn	Closed circuit
High beam	7 and 16	High beam	Closed circuit
		Flash–to–pass	Closed circuit
		Low beam	Open circuit
Low beam	16 and 17	High beam	Open circuit
		Flash–to–pass	Open circuit
		Low beam	Closed circuit
Flash–to–pass	8 and 16	High beam	Open circuit
		Flash–to–pass	Closed circuit
		Low beam	Open circuit