Master window/door lock/unlock switch

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	10 and 7 10 and 12 11 and 9 11 and 14	All window switches – at rest	Open circuit
	9 and 15 4 and 8 7 and 13 12 and 6	All window switches – all positions	Closed circuit
Left front window circuit	10 and 6	Up	Closed circuit
	10 and 13	Down	Closed circuit
Right front window circuit	11 and 8	Up	Closed circuit
	11 and 15	Down	Closed circuit

Terminals

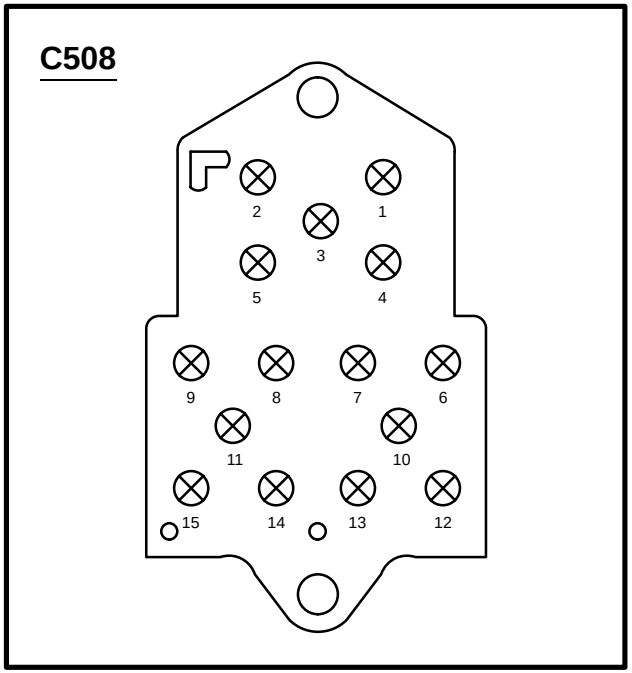
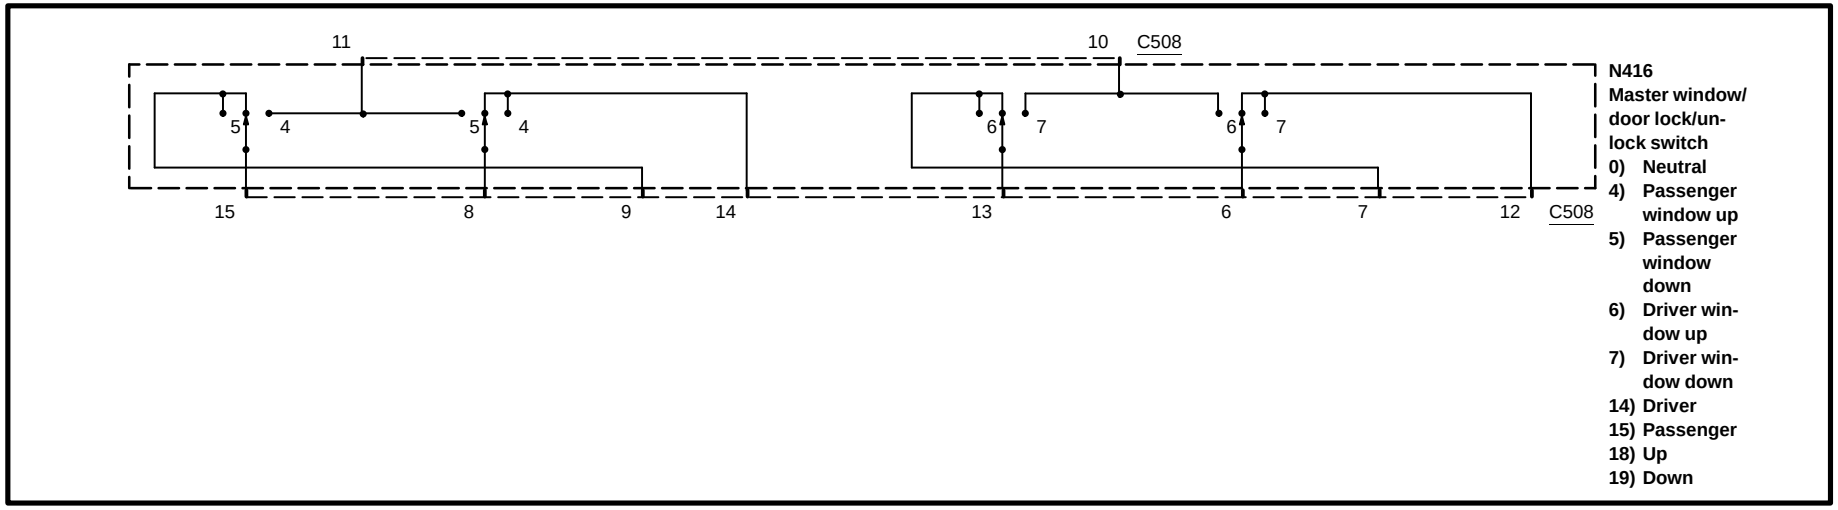
Schematic