Headlamp Switch, Autolamp Section

Schematic

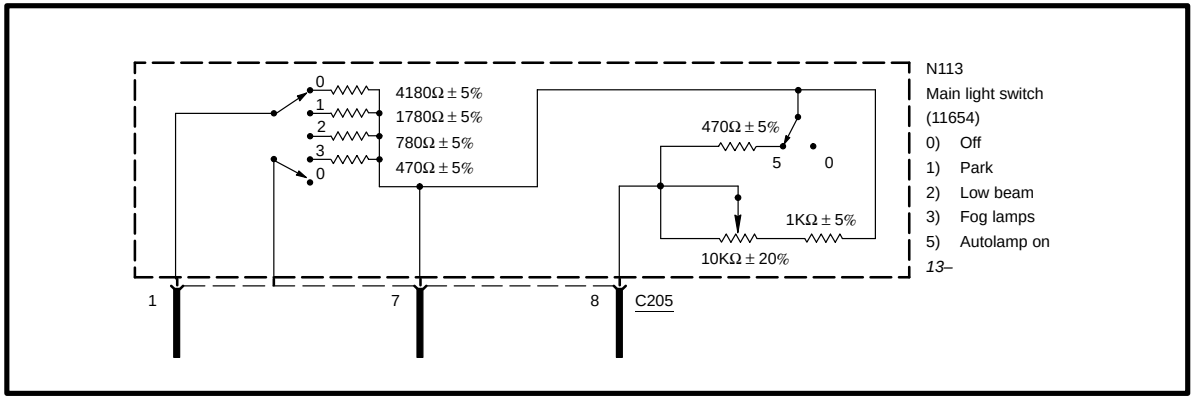

Terminals

C205

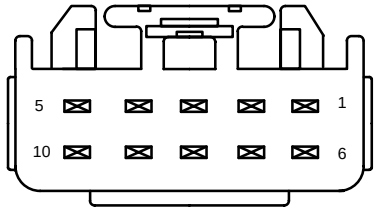

F10117

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Park lamps	1 and 7	Park lamps	1780Ω
Low beam	1 and 7	Low beam	780Ω
Autolamp Circuit	7 and 8	Off	320–450Ω
		On	1k–11kΩ