Multifunction Switch, Wiper/Washer Portion

Schematic

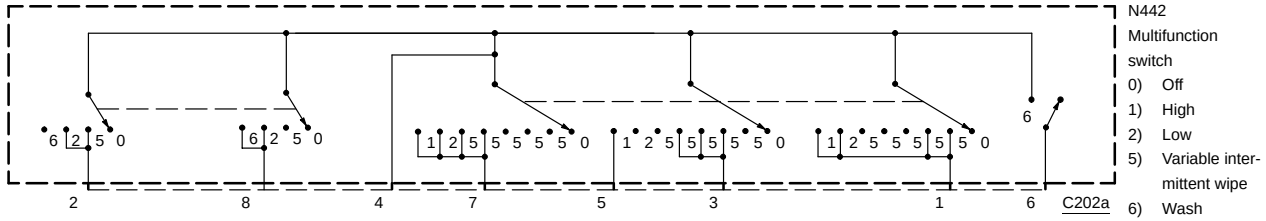

N442
Multifunction switch
0) Off
1) High
2) Low
5) Variable intermittent wipe
6) Wash

Terminals

C202a

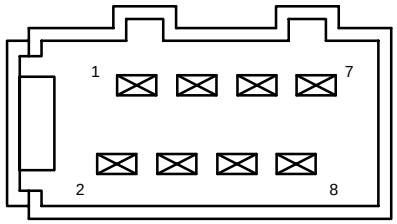

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Wiper switch circuit (rear wiper)	4 and 2	Off	Open circuit
	4 and 8		Open circuit
	4 and 2	Low	Closed circuit
	4 and 8		Open circuit
	4 and 2	High	Open circuit
	4 and 8		Closed circuit
Intermittent wiper circuit	4 and 7	Detent 1	Open circuit
	4 and 3		Open circuit
	4 and 1		Closed circuit
	4 and 7	Detent 2	Open circuit
	4 and 3		Closed circuit
	4 and 1		Closed circuit
	4 and 7	Detent 3	Open circuit
	4 and 3		Closed circuit
	4 and 1		Open circuit
	4 and 7	Detent 4	Closed circuit
	4 and 3		Closed circuit
	4 and 1		Open circuit
	4 and 7	Detent 5	Closed circuit
	4 and 3		Open circuit
	4 and 1		Open circuit