GAS/BI-FUEL PICKUP

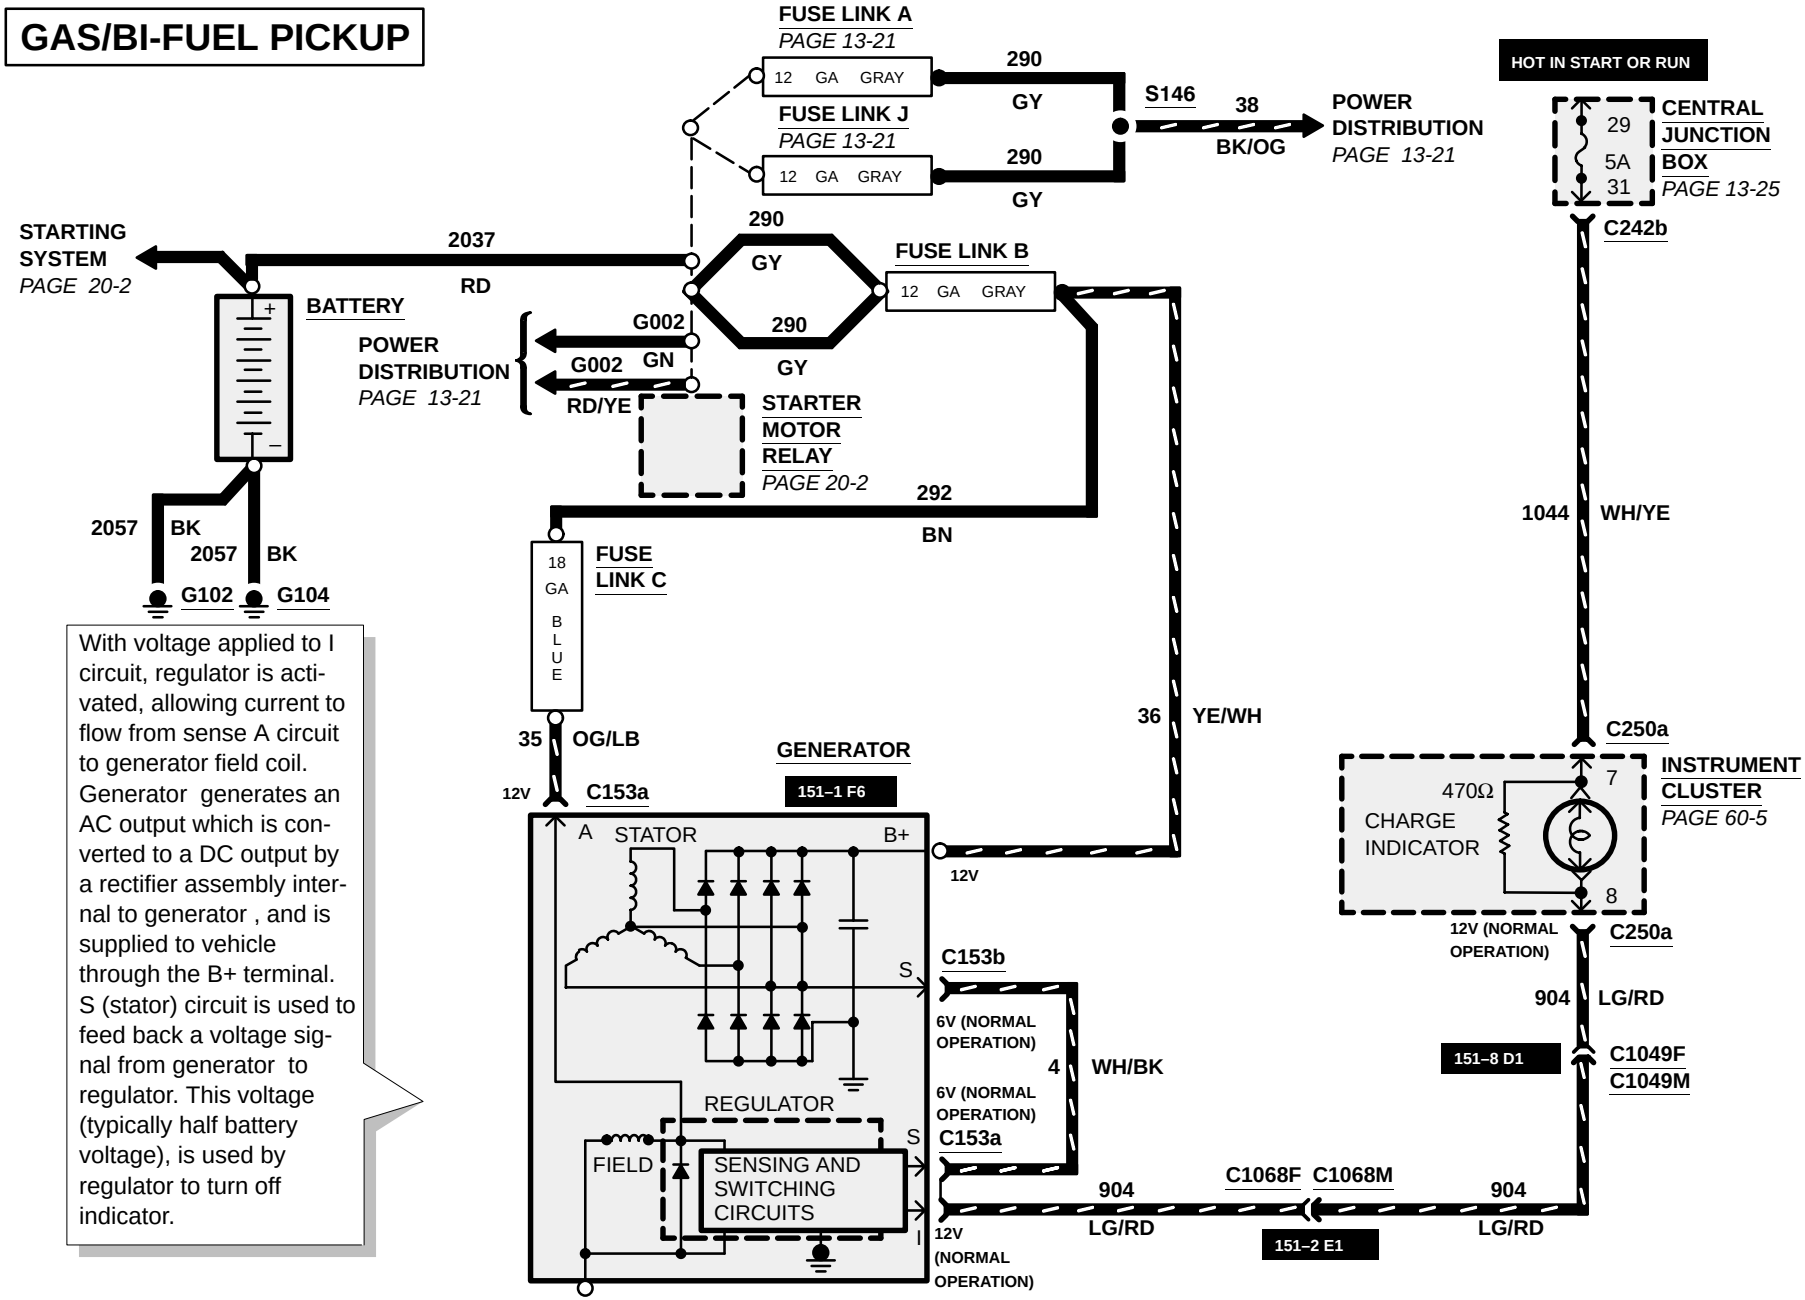

With voltage applied to I circuit, regulator is activated, allowing current to flow from sense A circuit to generator field coil. Generator generates an AC output which is converted to a DC output by a rectifier assembly internal to generator , and is supplied to vehicle through the B+ terminal. S (stator) circuit is used to feed back a voltage signal from generator to regulator. This voltage (typically half battery voltage), is used by regulator to turn off indicator.