Power door lock switch -10

Schematic

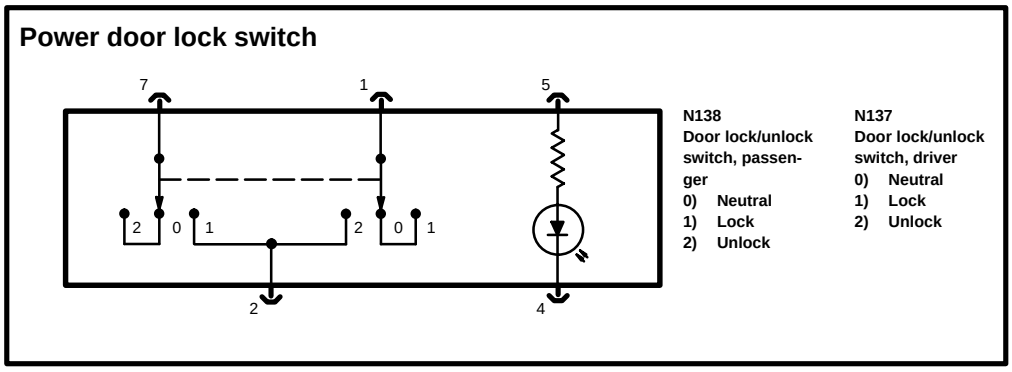

Terminal locations

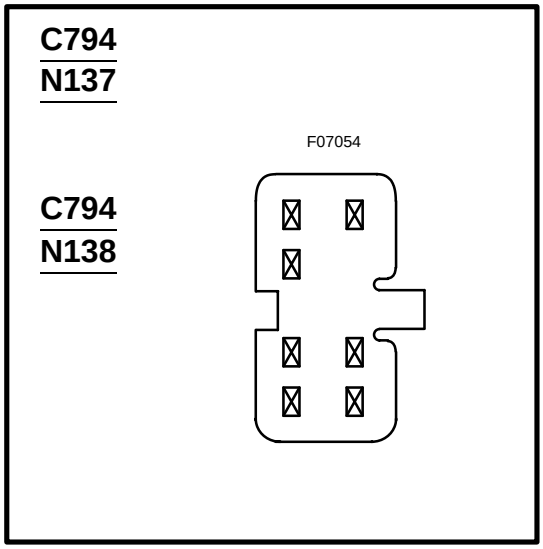

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock/unlock circuit	2 and 1	Neutral	Open circuit
		Lock	Open circuit
		Unlock	Closed circuit
	2 and 7	Neutral	Open circuit
		Lock	Closed circuit
		Unlock	Open circuit
	1 and 7	Neutral	Open circuit
		Lock	Open circuit
		Unlock	Open circuit