C4081b

14A005

Power luggage compartment lid module

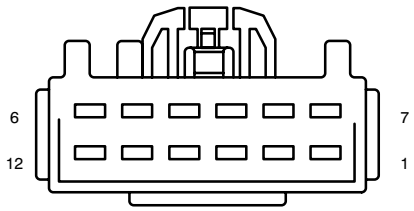

F12107

Pin	Circuit	Circuit function
1	1602 (WH/OG)	Luggage compartment lid motor – Down
2	–	not used
3	–	not used
4	1601 (WH/PK)	Luggage compartment lid closing motor – Up
5	1603 (RD/LG)	Luggage compartment lid closing motor – Down
6	–	not used
7	1600 (TN/RD)	Luggage compartment lid motor – Up
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used

* Cartier, Signature

C4081c

14A005

Power luggage compartment lid module

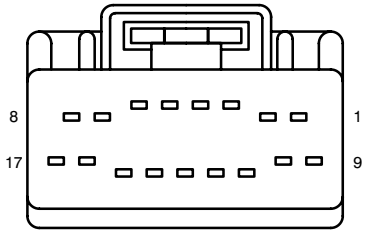

F17006

Pin	Circuit	Circuit function
1	679 (GY/BK)	to, Powertrain Control Module (PCM) (12A650)
2	–	not used
3	1617 (WH/LG)	signal 1
4	–	not used
5	1615 (WH/YE)	Sensor +
6	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
7	1609 (LG/YE)	clutch +
8	605 (RD)	Luggage compartment lid release solenoid (5443252), signal
9	–	not used
10	–	not used
11	1618 (WH/BK)	signal 2
12	676 (PK/OG)	Ground
13	1616 (OG/LG)	Sensor –
14	–	not used
15	1610 (WH/LB)	clutch –
16	–	not used
17	*797 (LG/VT)	Voltage supplied at all times (overload protected)