Power seat switch, left – Expedition

Schematic

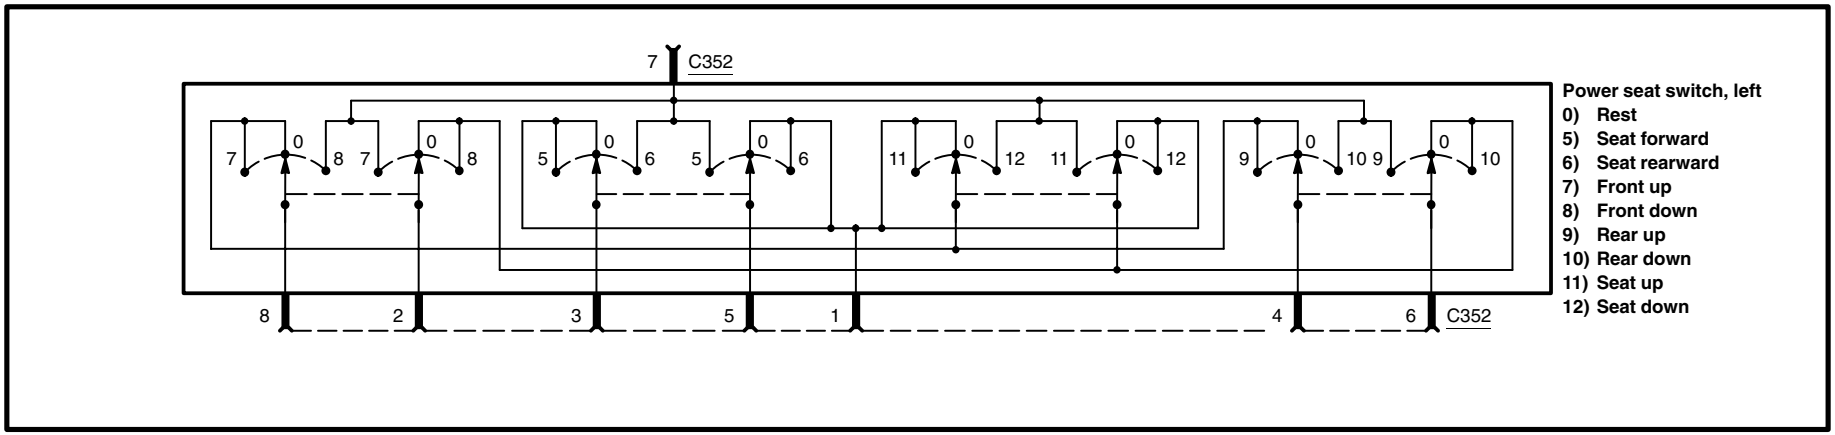

Terminals

C352



F08273

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Forward/rearward circuit	7 and 5	Forward	Closed circuit
		Rest	Open circuit
		Rearward	
	7 and 3	Forward	Open circuit
		Rest	
		Rearward	Closed circuit
	1 and 5	Forward	Open circuit
		Rest	Closed circuit
		Rearward	
	1 and 3	Forward	Closed circuit
		Rest	
		Rearward	Open circuit