Multifunction Switch, Lamp Portion (continued)

Schematic

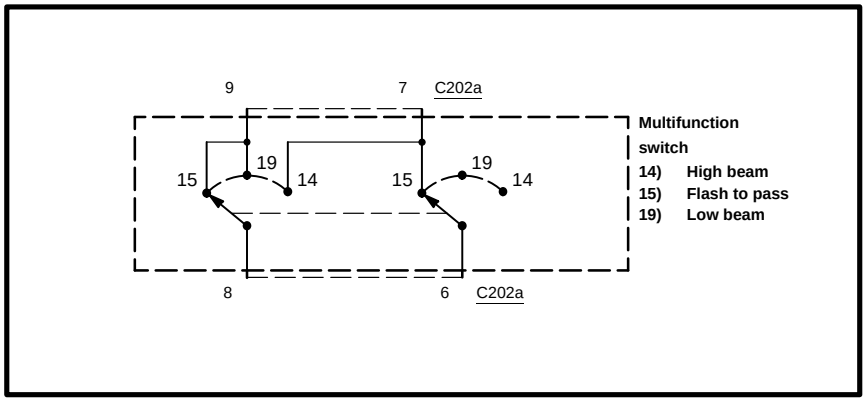

Terminals

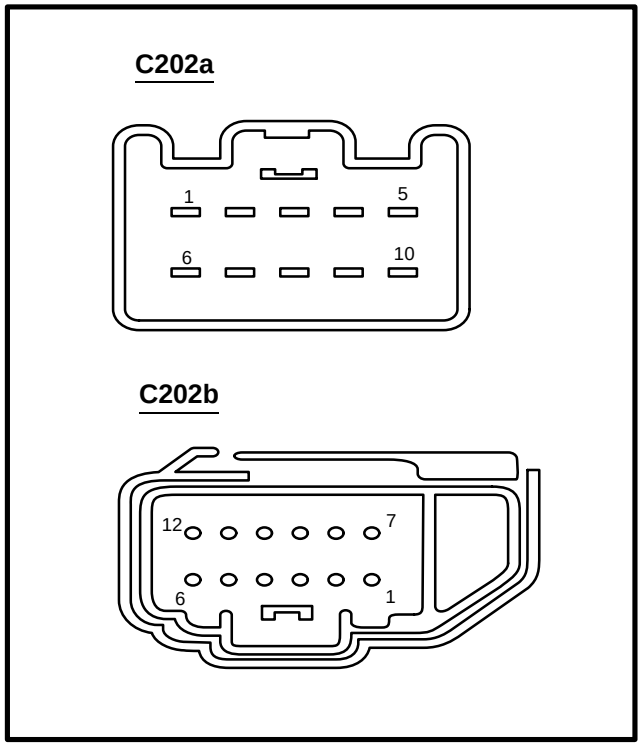

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
High beam	8 and 7	High beam	Closed circuit
		Flash–to–pass	Open circuit
		Low beam	Open circuit
Low beam/Flash–to–pass	8 and 9	High beam	Open circuit
		Flash–to–pass	Closed circuit
		Low beam	Closed circuit
	6 and 7	High beam	Open circuit
		Flash–to–pass	Closed circuit
		Low beam	Open circuit