Liftgate door lock switch

Schematic

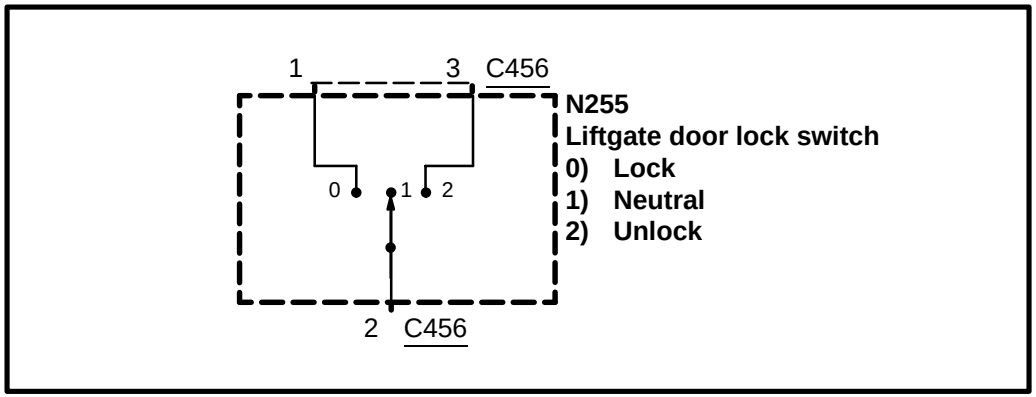

Terminals

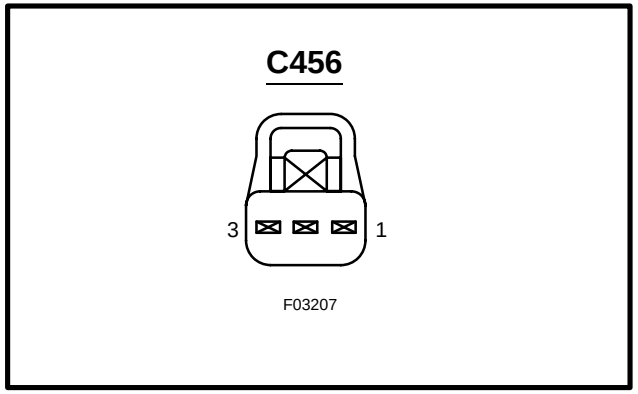

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Door lock switch	2 and 1	Lock	Closed circuit
		Unlock	Open circuit
		Neutral	Open circuit
	2 and 3	Lock	Open circuit
		Unlock	Closed circuit
		Neutral	Open circuit