Ignition switch

Schematic

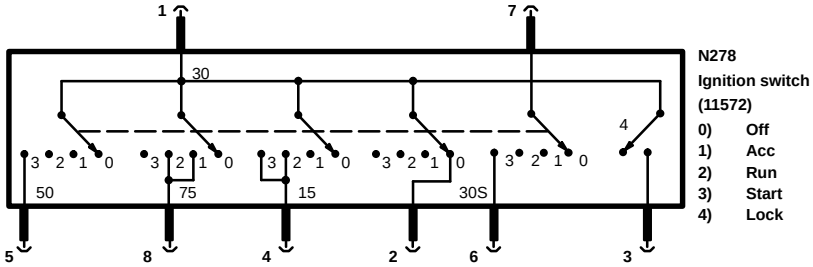

N278
Ignition switch
(11572)
0) Off
1) Acc
2) Run
3) Start
4) Lock

Terminal locations

C456



F08074

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Starter relay circuit	1 and 5	Off	Open circuit
		Accessory	Open circuit
		Run	Open circuit
		Start	Closed circuit
Run power circuit	1 and 4	Off	Open circuit
		Radio (18806)	Open circuit
		Run	Closed circuit
		Start	Closed circuit
Acc power circuit	1 and 8	Off	Open circuit
		Radio (18806)	Closed circuit
		Run	Closed circuit
		Start	Open circuit
Key reminder circuit	1 and 3	Key In	Closed circuit
		Key Out	Open circuit
Start power circuit	7 and 6	Off	Open circuit
		Radio (18806)	Open circuit
		Run	Open circuit
		Start	Closed circuit