Ignition Switch

SCHEMATIC

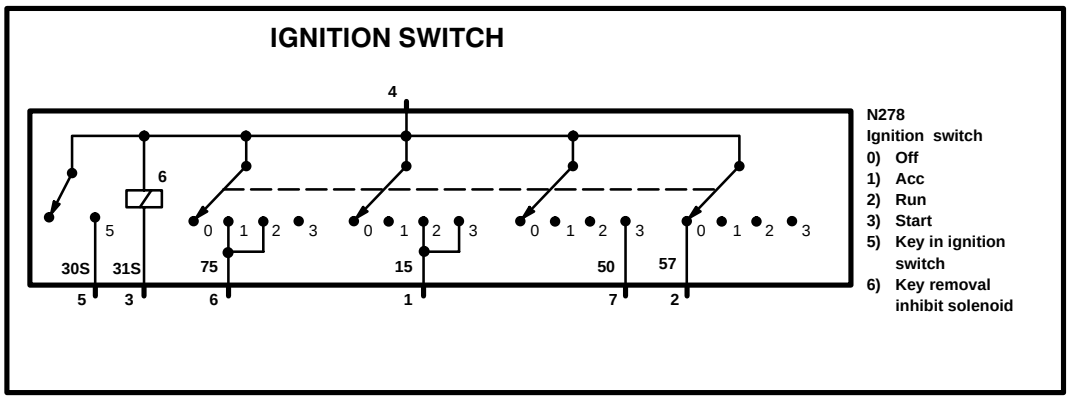

TERMINAL LOCATIONS

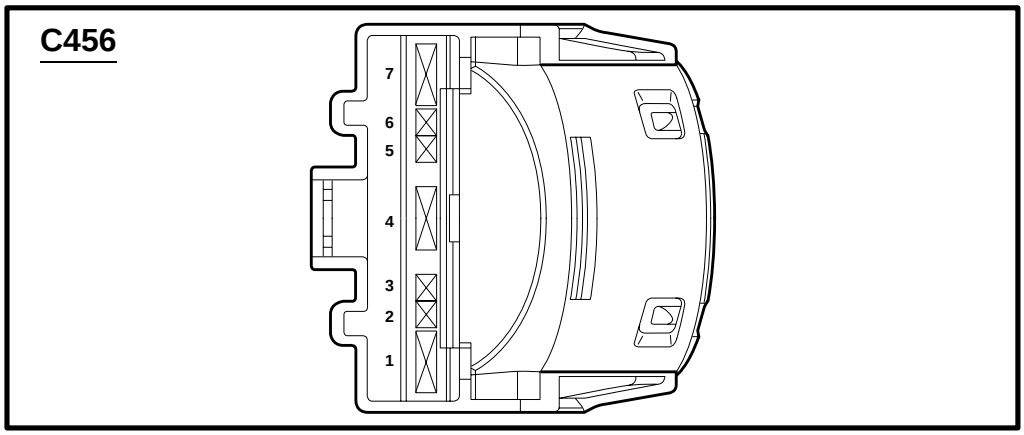

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Key to These Positions	A Good Switch Will Indicate
Starter Relay Circuit	4 and 7	Off	Open Circuit
		Acc	Open Circuit
		Run	Open Circuit
		Start	Closed Circuit
Run Power Circuit	4 and 1	Off	Open Circuit
		Acc	Open Circuit
		Run	Closed Circuit
		Start	Closed Circuit
Acc Power Circuit	4 and 6	Off	Open Circuit
		Acc	Closed Circuit
		Run	Closed Circuit
		Start	Open Circuit
Key Reminder Circuit	4 and 5	Key In	Closed Circuit
		Key Out	Open Circuit
Key Removal Inhibit Circuit	4 and 3		65-75 Ohms