Door lock switch, rear doors

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	3 and 5	Lock	Closed circuit
	1 and 2	Lock	Closed circuit
		Rest	Closed circuit
Unlock Switch Circuit	3 and 1	Unlock	Closed circuit
	5 and 4	Unlock	Closed circuit
		Rest	Closed circuit

Terminals

C4121



Schematic

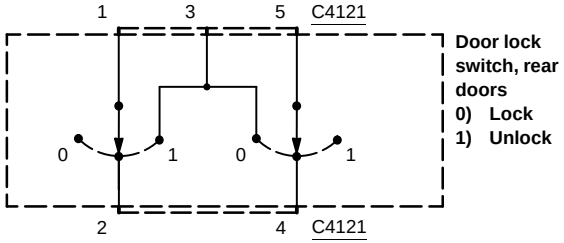

Door lock switch, rear doors
0) Lock
1) Unlock