C1018

14290

V34
PCM power diode



F02009

Pin	Circuit	Circuit function
1	546 (DG/YE)	Voltage supplied in Start and Run (overload protected)
2	16 (YE/WH)	Voltage supplied in Start and Run (overload protected)

C1019

14290

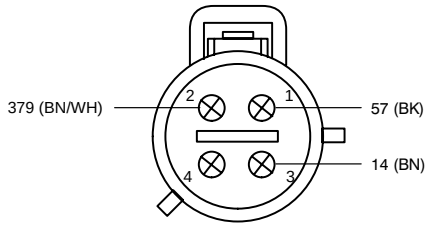

F04263

15A219

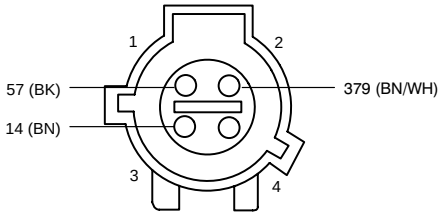

C1021

14290

E1
Headlamp, left
(13008)



F03169

Pin	Circuit	Circuit function
1	12 (LG/BK)	Power, Hot with High Beams on
2	57 (BK)	Ground
3	160 (DB/OG)	Low beams

C1023

14290

E164
Park/turn lamp, left
front (13411)



F03099

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	14 (BN)	Power, Exterior lamps
3	3 (LG/WH)	Turn lamps, feed, left front