Multifunction Switch, Wiper/Washer Portion

Schematic

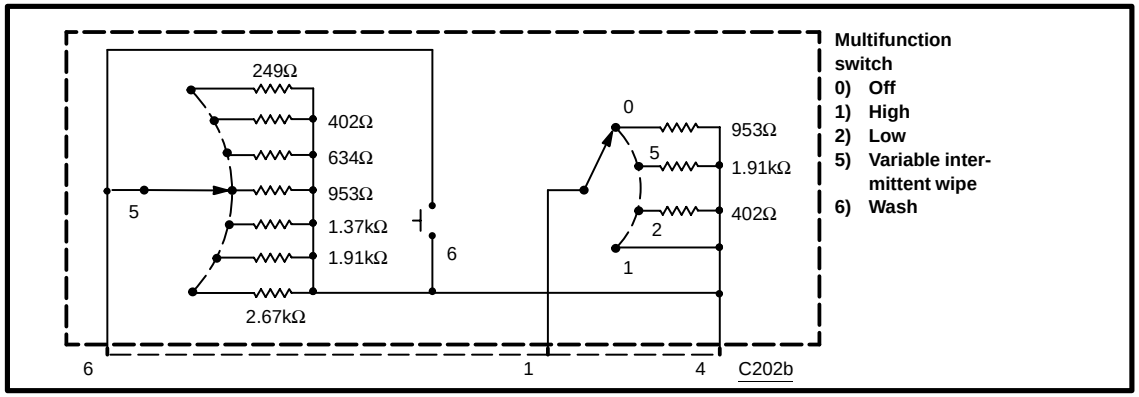

Terminals

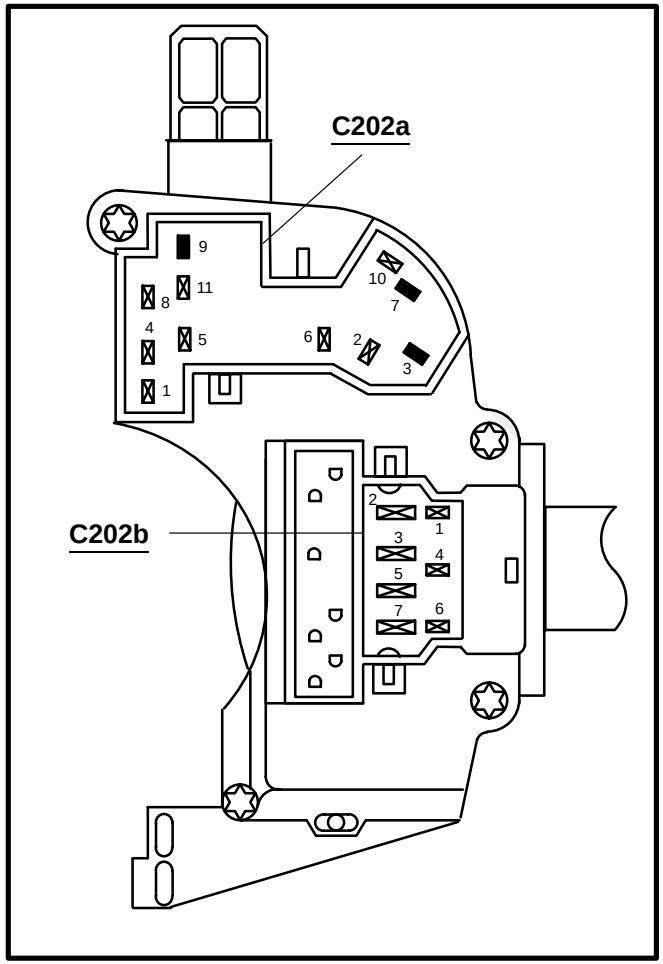

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Washer switch circuit	4 and 6	Washer switch depressed	Closed circuit
		Washer switch normal	Open circuit
Wiper switch circuit	1 and 4	Off	953Ω
		Intermittent	1.91kΩ
		Low	402Ω
		High	Closed circuit
Intermittent wiper circuit	4 and 6	#1 Detent	2.67kΩ
		#2 Detent	1.91kΩ
		#3 Detent	1.37kΩ
		#4 Detent	953Ω
		#5 Detent	634Ω
		#6 Detent	402Ω
		#7 Detent	249Ω