C214 (WH)

14N104

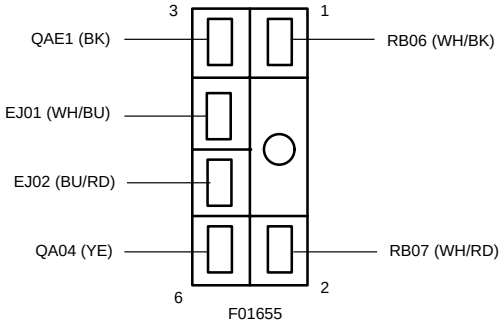

F01655

14A664

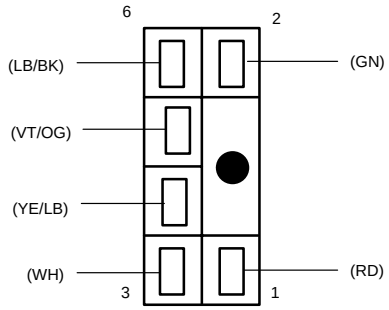

F06183

C215 (WH)

14N104

E61
Footwell lamp, left front (13411)



F02129

Pin	Circuit	Circuit function
1	LM02 (BN)	Voltage supplied at all times (overload protected)
2	LM92 (WH)	Illuminated entry, Ground

C218 (BK)

14A103

N278
Ignition switch
(11572)



F06116

Pin	Circuit	Circuit function
1	DA14 (WH/VT)	Voltage supplied at all times (overload protected)
2	DA21 (BN)	Voltage supplied in Start and Run (overload protected)
3	ST01 (RD)	Voltage supplied in Start (overload protected)
4	DA23 (WH/BU)	Voltage supplied in Start (overload protected)
5	DA20 (WH/GN)	Voltage in Run or Accessory (overload protected)
6	DA22 (RD/GN)	Voltage in Run (overload protected)