C225

14401

Center image amplifier

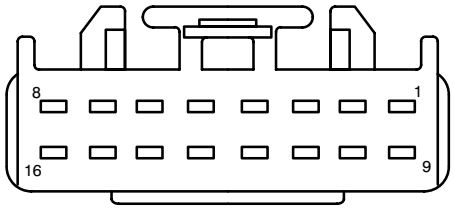

F16029

Pin	Circuit	Circuit function
1	1-MD12 (WH)	Center image amplifier +
2	2-MD12 (GY)	Center image amplifier -
3	48-MD12	Center image amplifier, Shield
4	–	not used
5	8-MD31 (WH/GN)	Center image speaker, right +
6	10-MD31 (GY/OG)	Center image speaker, right -
7	8-MD30 (WH/BU)	Center image speaker, left +
8	10-MD30 (GY/VT)	Center image speaker, left -
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	7-MD12 (YE)	Center image amplifier, Enable
14	–	not used
15	31-MD12 (BK/YE)	Ground
16	29-MD12 (OG/YE)	Voltage supplied at all times (overload protected)

C226

14401

Steering position sensor (18B015)



F04153

Pin	Circuit	Circuit function
1	7-CC16A (YE/BK)	Steering position sensor (18B015), position sense
2	10-CC17 (GY)	Steering position sensor (18B015), signal 2
3	8-CC18 (WH/RD)	Steering position sensor (18B015), signal 1
4	9-CC16 (BN/YE)	Signal return