Front passenger window/door lock switch

Schematic

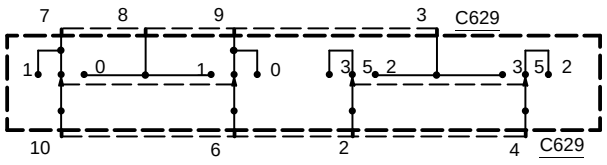

N627
Front passenger window/door lock switch
0) Up
1) Down
2) Lock
3) Unlock
5) Neutral

Terminals

C629

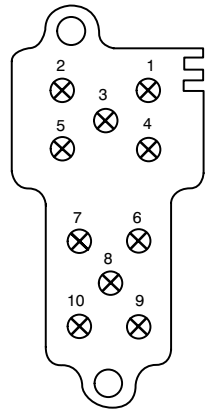

F10131

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	8 and 7 8 and 9	Window switch all positions	Open circuit
	7 and 10 9 and 6	Window switch, at rest	Closed circuit
	3 and 4 3 and 2	Door lock switch, at rest	Open circuit
Right front window circuit	8 and 10, 9 and 6	Up	Closed circuit
	8 and 6, 10 and 7	Down	Closed circuit
Door lock switch	3 and 2, 5 and 4	Lock	Closed circuit
	3 and 4, 1 and 2	Unlock	Closed circuit