-14

Power Window Switch

SCHEMATIC

POWER WINDOW SWITCH

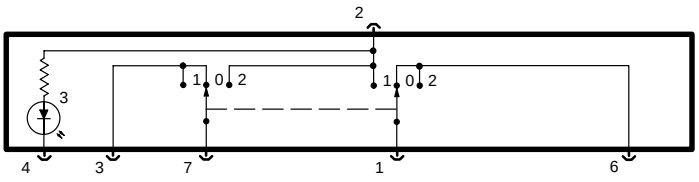

N297
Window operating switch, passenger side front
0) Off
1) Up
2) Down
3) Illumination

TERMINAL LOCATIONS

C489

F07047



COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Window Regulator Circuit	7 and 3	Off	Closed Circuit
		Window up	Closed Circuit
		Window down	Open Circuit
	7 and 2	Off	Open Circuit
		Window up	Open Circuit
		Window down	Closed Circuit
	1 and 2	Off	Open Circuit
		Window up	Closed Circuit
		Window down	Open Circuit
	1 and 6	Off	Closed Circuit
		Window up	Open Circuit
		Window down	Closed Circuit