# Component Testing – Ignition switch



## SCHEMATIC

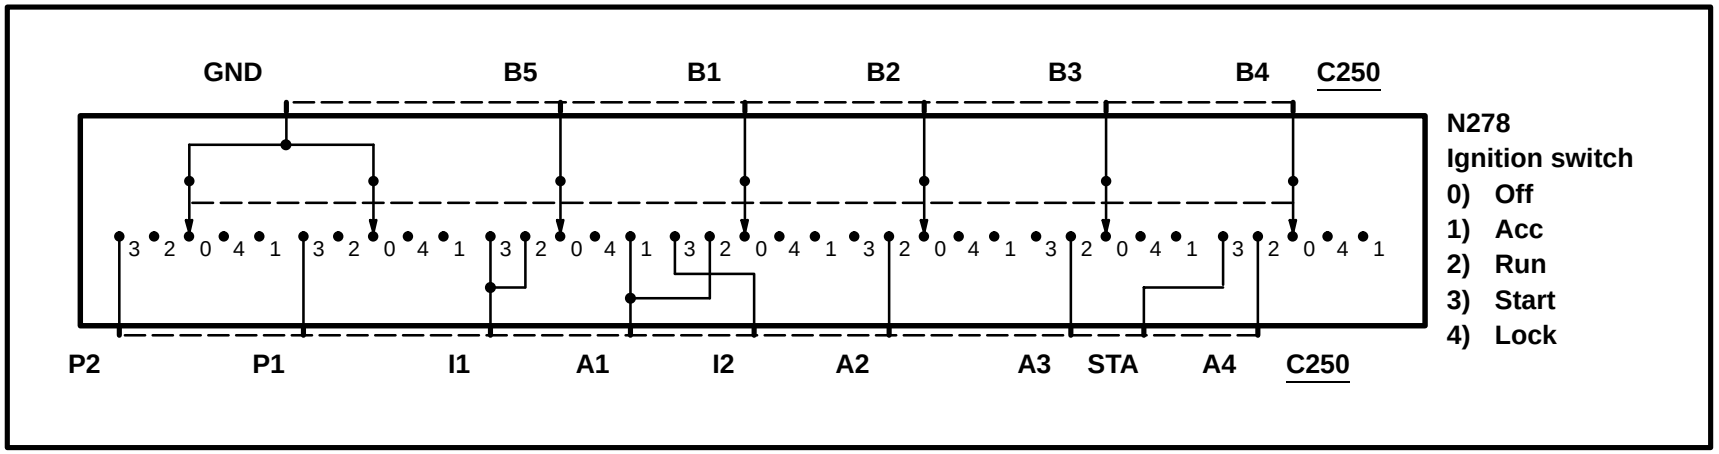


## TERMINALS

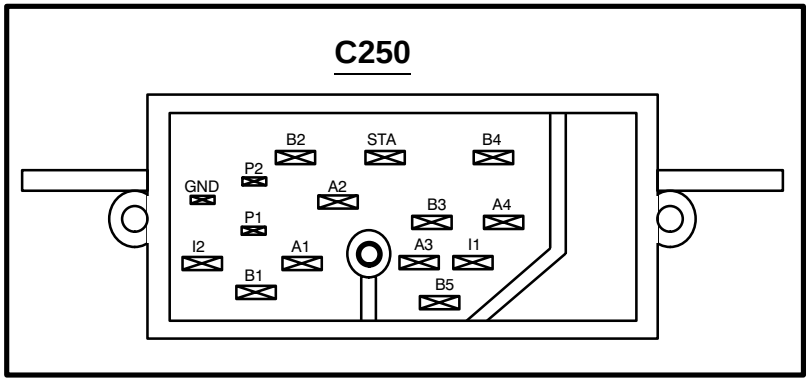


## COMPONENT TESTING PROCEDURE

| TO TEST | Connect Self-Powered Test Light or Ohmmeter to Terminals | Move Key to These Positions | A Good Switch Will Indicate |
|---|---|---|---|
| **Run Power Circuit** | B1 and A1<br>B2 and A2<br>B4 and A4 | Off/Lock | Open Circuit |
| | | Acc | Open Circuit |
| | | Run | Closed Circuit |
| | | Start | Open Circuit |
| **Run/Start Power Circuit** | B5 and I1 | Off/Lock | Open Circuit |
| | | Acc | Open Circuit |
| | | Run | Closed Circuit |
| | | Start | Closed Circuit |
| **Run/Acc Power Circuit** | B5 and A1 | Off/Lock | Open Circuit |
| | | Acc | Closed Circuit |
| | | Run | Closed Circuit |
| | | Start | Open Circuit |
| **Start Power Circuit** | GND and P1<br>B4 and STA | Off/Lock | Open Circuit |
| | | Acc | Open Circuit |
| | | Run | Open Circuit |
| | | Start | Closed Circuit |