Front passenger window/door lock switch

Schematic

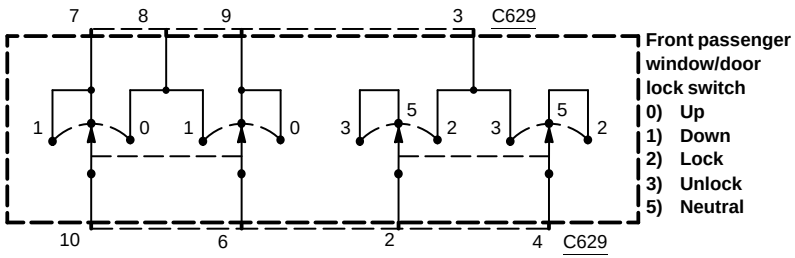

Terminals

C629

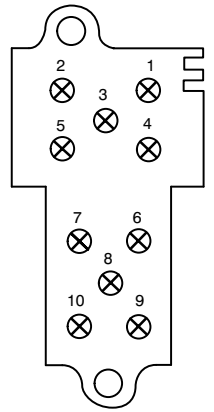

F10131

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	8 and 7 8 and 9	Window switch all positions	Open circuit
	7 and 10 9 and 6	Window switch, at rest	Closed circuit
	3 and 4 3 and 2	Door lock switch, at rest	Open circuit
Right front window circuit	8 and 10, 9 and 6	Up	Closed circuit
	8 and 6, 10 and 7	Down	Closed circuit
Door lock switch	3 and 2	Lock	Closed circuit
	3 and 4	Unlock	Closed circuit