Multifunction Switch, Wiper/Washer Portion

Schematic

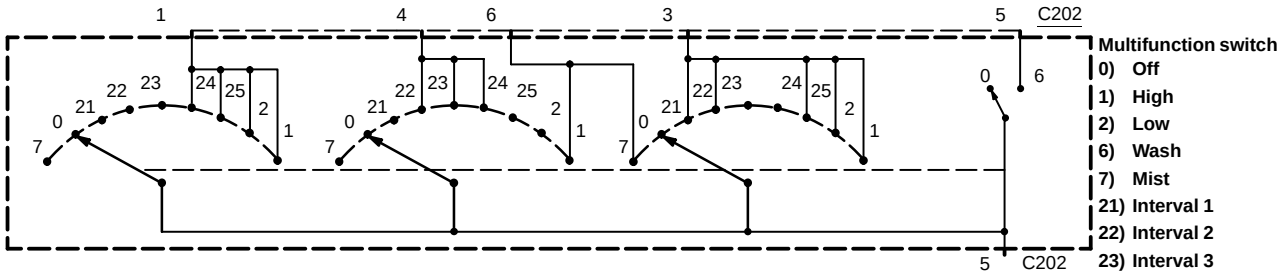

Terminals

C202



F12030

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Washer switch circuit	5 and 2	Washer switch depressed	Closed circuit
Wiper switch circuit	1 and 2	Off	Open circuit
		High	Closed circuit
		Low	Closed circuit
	6 and 2	Off	Open circuit
		High	Closed circuit
		Low	Open circuit
	3 and 2	Off	Closed circuit
		High	Closed circuit
		Low	Closed circuit
Intermittent wiper circuit	1 and 2	Intermittent 1	Open circuit
		Intermittent 2	Open circuit
		Intermittent 3	Open circuit
		Intermittent 4	Closed circuit
		Intermittent 5	Closed circuit
	4 and 2	Intermittent 1	Open circuit
		Intermittent 2	Closed circuit
		Intermittent 3	Closed circuit
		Intermittent 4	Closed circuit
		Intermittent 5	Open circuit
	3 and 2	Intermittent 1	Closed circuit
		Intermittent 2	Closed circuit
		Intermittent 3	Open circuit
		Intermittent 4	Open circuit
		Intermittent 5	Open circuit
Mist Circuit	6 and 2	Mist	Closed circuit