* Late production

C290b (GY)

14401

Radio (18806)

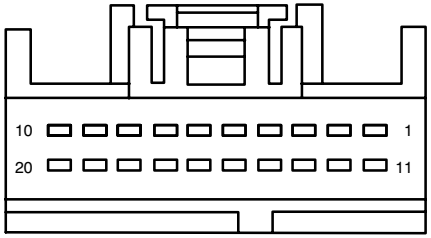

F20057

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	914 (TN/OG)	SCP Bus +
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	689 (DB) *1442 (DG/WH)	Parking aid, mute, signal
18	–	not used
19	915 (PK/LB)	SCP Bus –
20	–	not used

C290c (GY)

14401

Radio (18806)

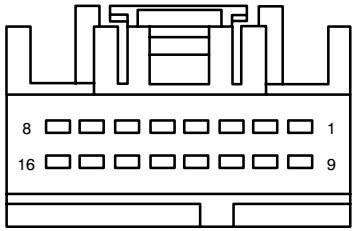

F16151

Pin	Circuit	Circuit function
1	798 (LG/RD)	Radio (18806), to CD changer, Left –
2	856 (VT)	Radio (18806), to CD changer, Left +
3	48	Shield
4	725 (PK)	Radio (18806), to cellular phone, audio +
5	724 (LB/YE)	Radio (18806), to cellular phone, audio –
6	1068 (LG/BK)	Audio System ON (ASYSON)
7	832 (LB/PK)	Audio corporate protocol A
8	833 (TN)	Audio corporate protocol B
9	799 (OG/BK)	Radio (18806), to CD changer, Right –
10	690 (GY)	Radio (18806), to CD changer, Right +
11	–	not used
12	–	not used
13	48	Shield
14	–	not used
15	–	not used
16	–	not used