-12

Power Door Lock Switch

SCHEMATIC

POWER DOOR LOCK SWITCH

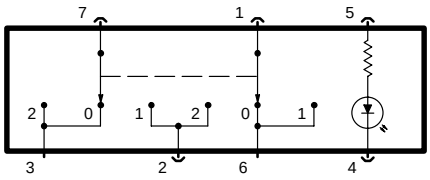

N138	N137
Door lock/unlock switch, passenger	Door lock/unlock switch, driver
0) Neutral	0) Neutral
1) Lock	1) Lock
2) Unlock	2) Unlock

TERMINAL LOCATIONS

C1927
N137

C1928
N138

F07047



COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Lock/Unlock Circuit	2 and 1	Neutral	Open Circuit
		Lock	Open Circuit
		Unlock	Closed Circuit
	2 and 7	Neutral	Open Circuit
		Lock	Closed Circuit
		Unlock	Open Circuit
	1 and 7	Neutral	Open Circuit
		Lock	Open Circuit
		Unlock	Open Circuit