Power door lock switch

Schematic

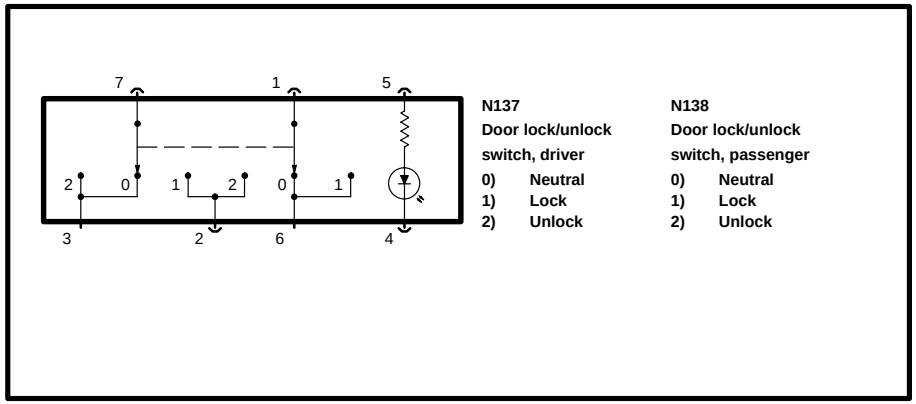

N137
Door lock/unlock switch, driver
0) Neutral
1) Lock
2) Unlock

N138
Door lock/unlock switch, passenger
0) Neutral
1) Lock
2) Unlock

Terminal locations

C1927
N137

C1928
N138

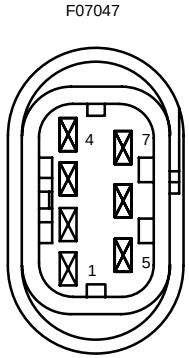

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock/unlock circuit	2 and 1	Neutral	Open circuit
		Lock	Open circuit
		Unlock	Closed circuit
	2 and 7	Neutral	Open circuit
		Lock	Closed circuit
		Unlock	Open circuit
	1 and 7	Neutral	Open circuit
		Lock	Open circuit
		Unlock	Open circuit