COMPONENT TESTING: EXTERIOR REAR VIEW MIRROR SWITCH

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Left Mirror Up Circuit	3 and 9, 7 and 4	Select Switch to Left and Control Switch to Up	Closed Circuit Closed Circuit
Left Mirror Down Circuit	3 and 4, 7 and 9	Select Switch to Left and Control Switch to Down	Closed Circuit Closed Circuit
Left Mirror Left Circuit	3 and 1, 7 and 4	Select Switch to Left and Control Switch to Left	Closed Circuit Closed Circuit
Left Mirror Right Circuit	3 and 4, 7 and 1	Select Switch to Left and Control Switch to Right	Closed Circuit Closed Circuit
Right Mirror Up Circuit	3 and 8, 7 and 4	Select Switch to Right and Control Switch to Up	Closed Circuit Closed Circuit
Right Mirror Down Circuit	3 and 4, 7 and 8	Select Switch to Right and Control Switch to Down	Closed Circuit Closed Circuit
Right Mirror Left Circuit	3 and 2, 7 and 4	Select Switch to Right and Control Switch to Left	Closed Circuit Closed Circuit
Right Mirror Right Circuit	3 and 4, 7 and 2	Select Switch to Right and Control Switch to Right	Closed Circuit Closed Circuit

TERMINALS

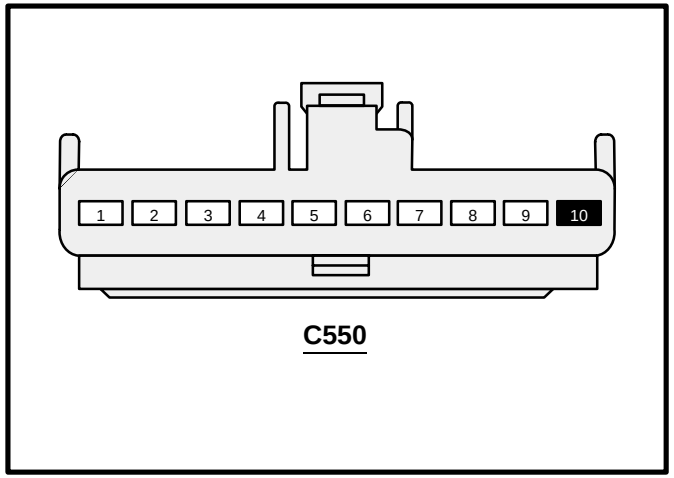
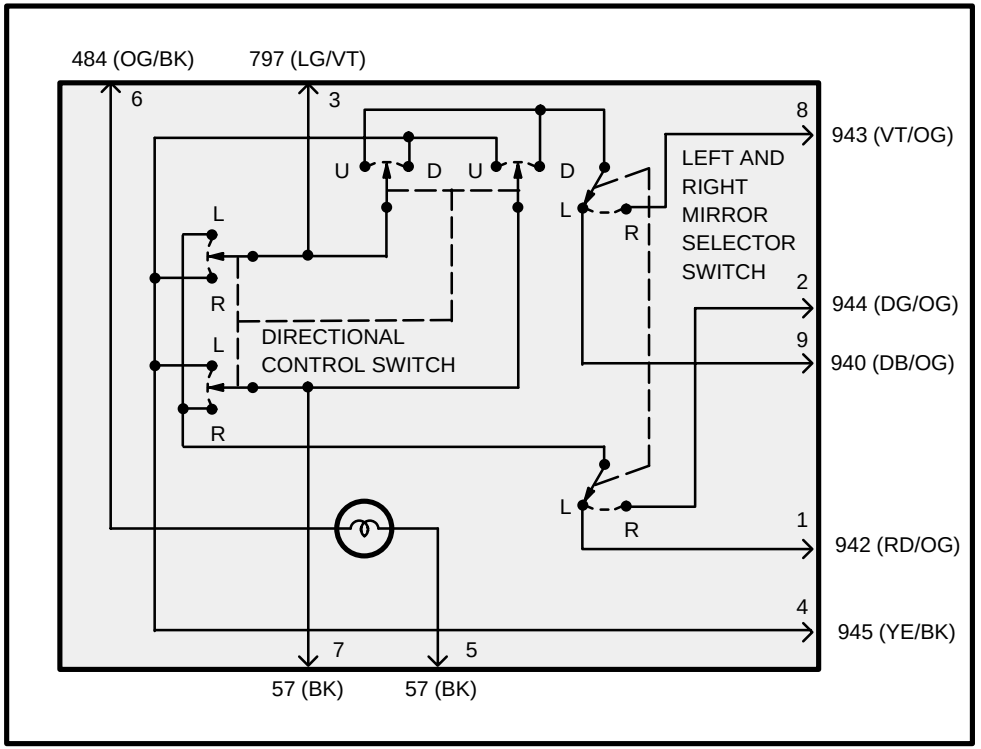
SCHEMATIC