Exterior rear view mirror switch (17B676)

Schematic

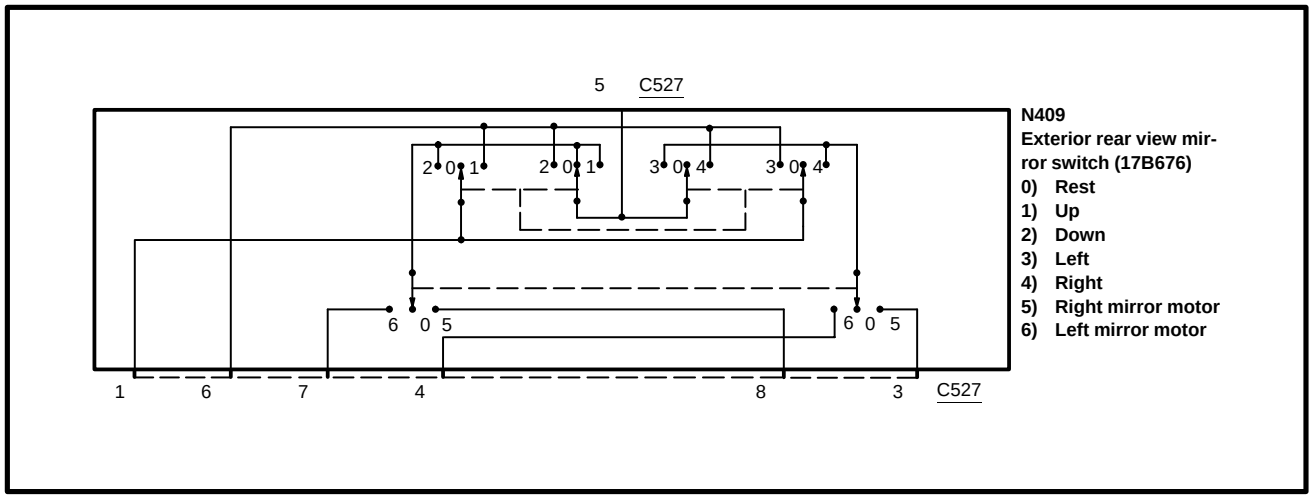

Terminals

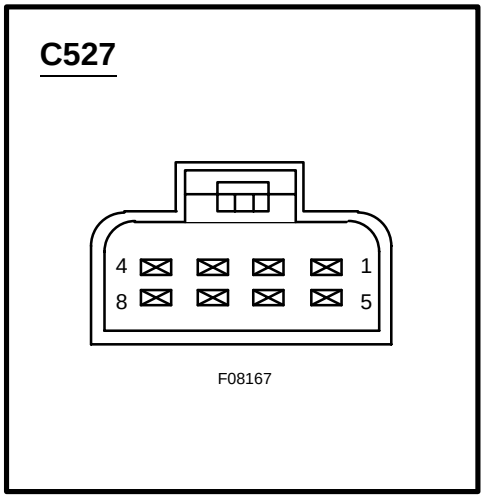

Component testing procedure

Circuit to test		Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Left mirror	**Up**	5 and 7 6 and 1	Selector switch Left Adjuster Switch Up	Closed circuit
	Down	5 and 6 7 and 1	Selector switch Left Adjuster Switch Down	Closed circuit
	Left	5 and 4 6 and 1	Selector switch Left Adjuster Switch Left	Closed circuit
	Right	5 and 6 4 and 1	Selector switch Left Adjuster Switch Right	Closed circuit
Right mirror	**Up**	5 and 8 6 and 1	Selector switch Right Adjuster Switch Up	Closed circuit
	Down	5 and 6 8 and 1	Selector switch Right Adjuster Switch Down	Closed circuit
	Left	5 and 3 6 and 1	Selector switch Right Adjuster Switch Left	Closed circuit
	Right	5 and 6 3 and 1	Selector switch Right Adjuster Switch Right	Closed circuit