C290a (BK)

14401

Radio (18806)

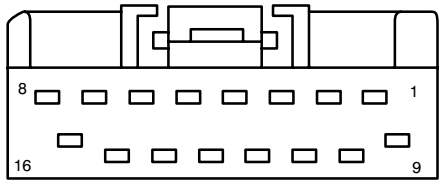

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination, feed
2	1205 (BK)	Illumination, Ground
3	32 (RD/LB)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	828 (VT/LB)	Voltage supplied at all times (overload protected)
10	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	audio ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	audio ground

C290b (BK)

19B113

Radio (18806)



F08197

Pin	Circuit	Circuit function
1	168 (RD/BK)	Radio (18806) – Subwoofer, High, –
2	167 (BN/OG)	Radio (18806) – Subwoofer, High, +
3	48	Shield
4	173 (DG/VT)	Radio (18806), Subwoofer, High, mute
5	172 (LB/RD)	Radio (18806), Subwoofer, Low, –
6	169 (LG/BK)	Radio (18806), Subwoofer, Low, +
7	48	Shield
8	174 (GY/BK)	Radio (18806), Subwoofer, Low, mute