Door lock switch, passenger side (14028)

Schematic

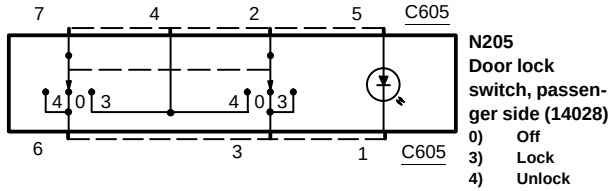

N205
Door lock switch, passenger side (14028)
0) Off
3) Lock
4) Unlock

Terminals

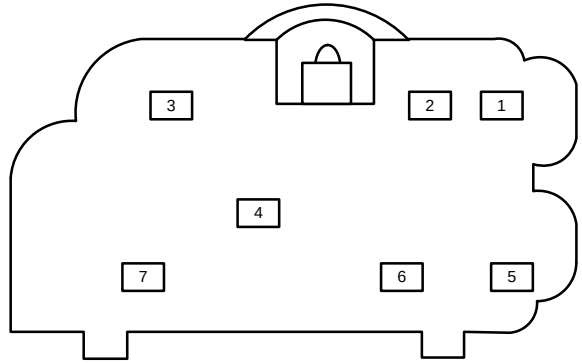

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Unlock Switch Circuit	4 and 3	Unlock	Closed circuit
	3 and 2	at rest, Lock	Closed circuit
Lock Switch Circuit	4 and 7	Lock	Closed circuit
	6 and 7	at rest, Unlock	Closed circuit