# 149-11 COMPONENT TESTING: REAR POWER DOOR LOCK SWITCH



## COMPONENT TESTING PROCEDURE

| TO TEST | Connect Self-Powered Test Lamp or Ohmmeter to Terminals | Move Switch to These Positions | A Good Switch Will Indicate |
|---|---|---|---|
| **Lock Switch Circuit** | 3 and 5 | Lock | Closed Circuit |
| | 1 and 2 | Lock and at Rest | Closed Circuit |
| **Unlock Switch Circuit** | 3 and 1 | Unlock | Closed Circuit |
| | 5 and 4 | Unlock and at Rest | Closed Circuit |

## SCHEMATIC

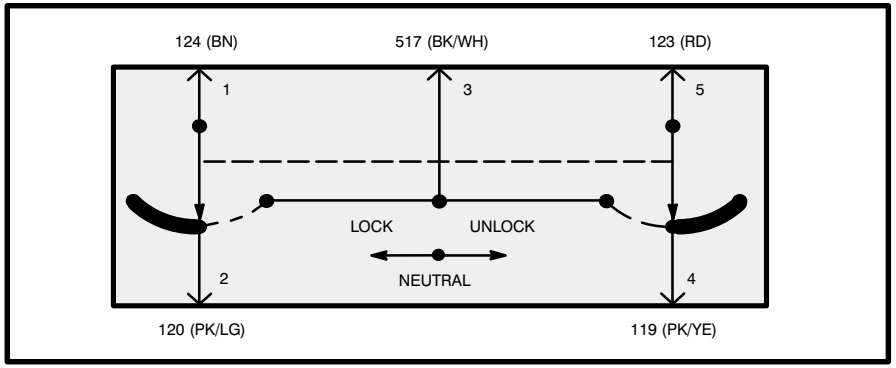


## TERMINALS

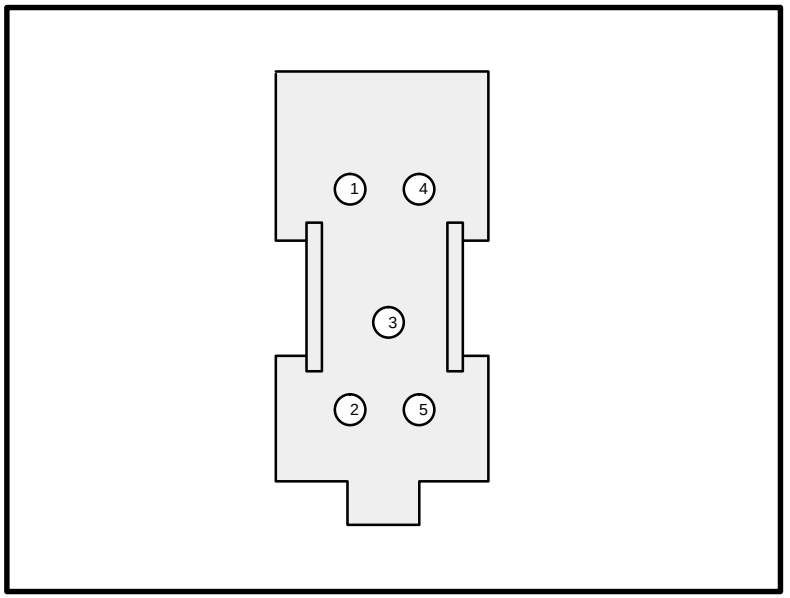


**REVISED**