Power seat switch, left, Signature, Cartier

Schematic

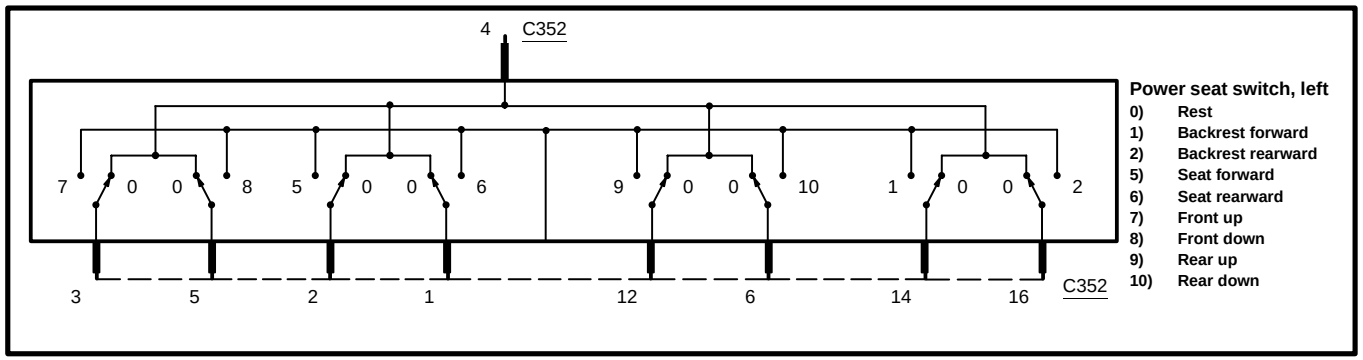

Terminals

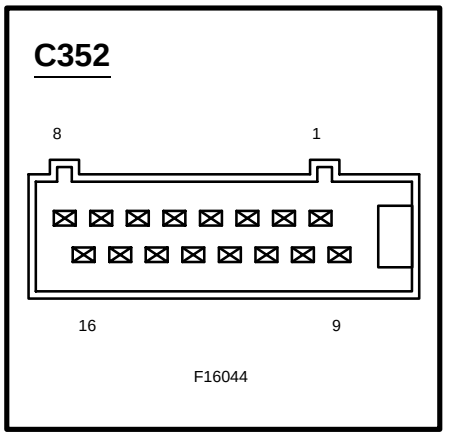

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Front height circuit	4 and 3	Up	Open circuit
	4 and 5	Down	Open circuit
Rear height circuit	4 and 12	Up	Open circuit
	4 and 6	Down	Open circuit
Forward/rearward circuit	4 and 2	Forward	Open circuit
	4 and 1	Rearward	Open circuit
Backrest circuit	4 and 14	Forward	Open circuit
	4 and 16	Rearward	Open circuit