Exterior rear view mirror switch (17B676)

Schematic

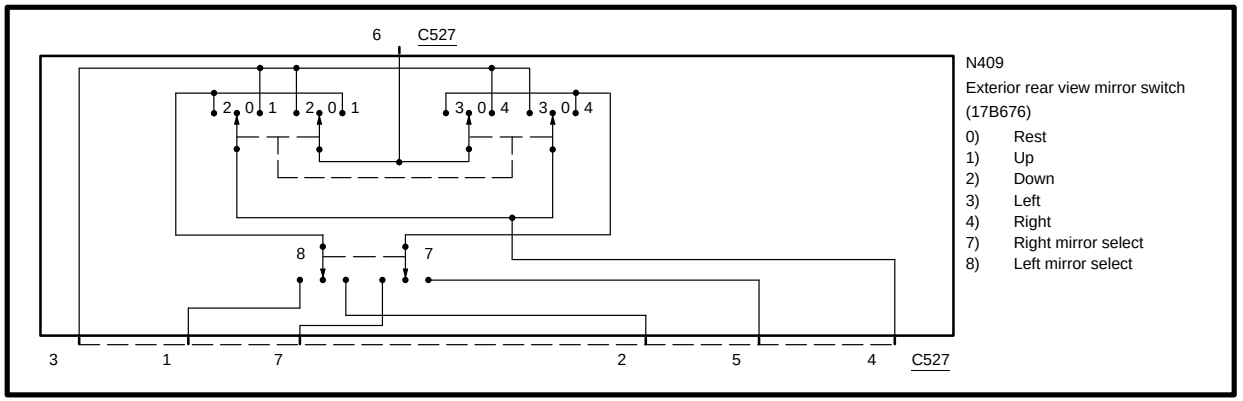

Terminals

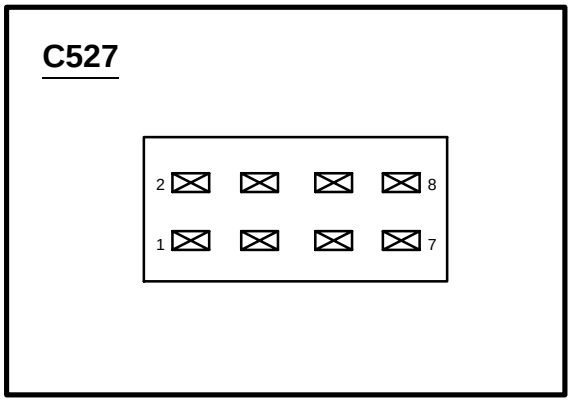

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Left mirror		**Selector switch Left**	
Up	6 and 1 3 and 4	Up	Closed circuit
Down	6 and 3 1 and 4	Down	Closed circuit
Left	6 and 7 3 and 4	Left	Closed circuit
Right	6 and 3 7 and 4	Right	Closed circuit
Right mirror		**Selector switch Right**	
Up	6 and 2 3 and 4	Up	Closed circuit
Down	6 and 3 2 and 4	Down	Closed circuit
Left	6 and 5 3 and 4	Left	Closed circuit
Right	6 and 3 5 and 4	Right	Closed circuit