Master window/door lock/unlock switch

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	3 and 4	Lock	Closed circuit
	1 and 2	Lock	Closed circuit
		Rest	Closed circuit
Unlock Switch Circuit	3 and 2	Unlock	Closed circuit
	5 and 4	Rest	Closed circuit

Terminals

C508

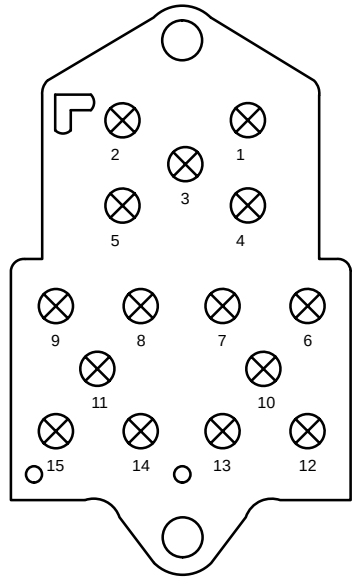

Schematic

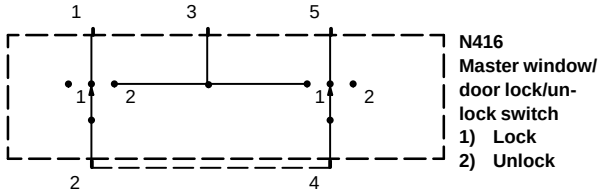

N416
Master window/door lock/unlock switch
1) Lock
2) Unlock