Master window/door lock/unlock switch – front and rear power windows

Schematic

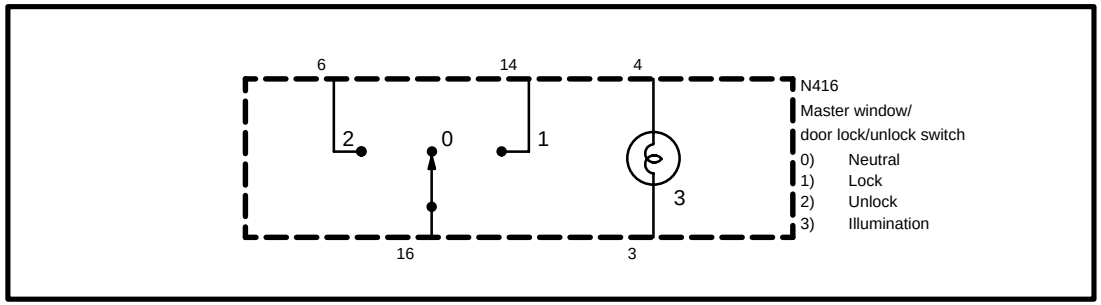

Terminal locations

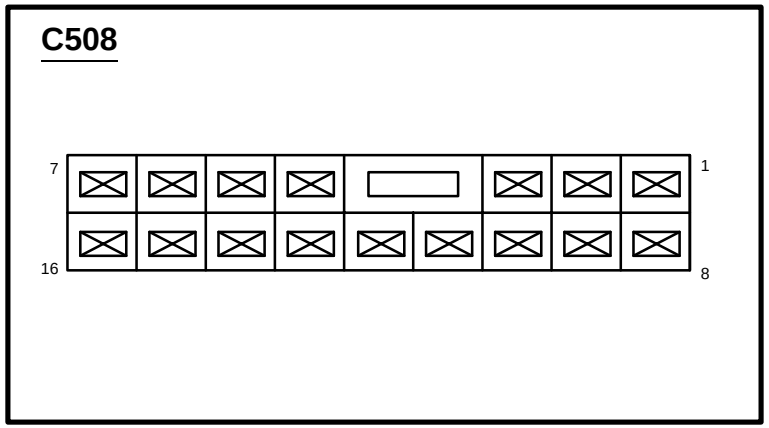

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock/unlock circuit	6 and 16	Neutral	Open circuit
		Lock	Open circuit
		Unlock	Closed circuit
	14 and 16	Neutral	Open circuit
		Lock	Closed circuit
		Unlock	Open circuit