Multifunction switch, (front wiper)

Schematic

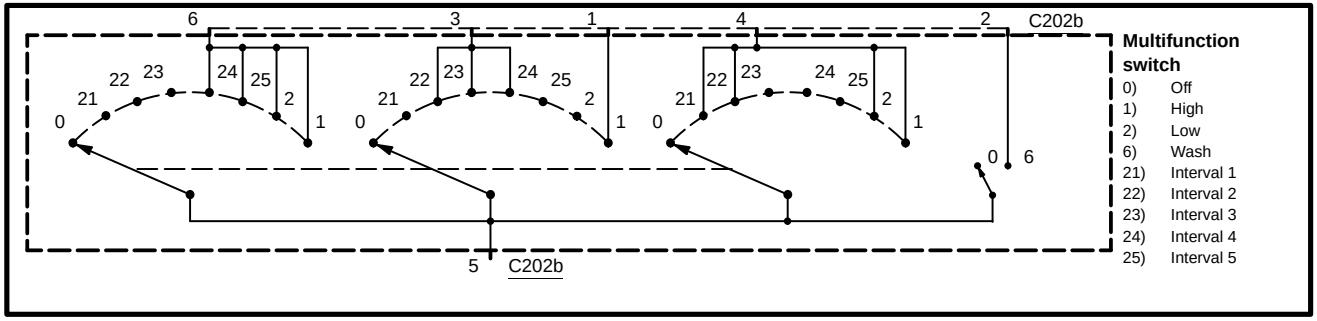

Terminals

C202b



F06301

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Washer switch circuit	2 and 5	Washer switch depressed	Closed circuit
Wiper switch circuit	6 and 5	Off	Open circuit
		High	Closed circuit
		Low	Closed circuit
	1 and 5	Off	Open circuit
		High	Closed circuit
		Low	Open circuit
	4 and 5	Off	Open circuit
		High	Closed circuit
		Low	Closed circuit
Intermittent wiper circuit	6 and 5	Intermittent 1	Open circuit
		Intermittent 2	Open circuit
		Intermittent 3	Open circuit
		Intermittent 4	Closed circuit
		Intermittent 5	Closed circuit
	3 and 5	Intermittent 1	Open circuit
		Intermittent 2	Closed circuit
		Intermittent 3	Closed circuit
		Intermittent 4	Closed circuit
		Intermittent 5	Open circuit
	4 and 5	Intermittent 1	Closed circuit
		Intermittent 2	Closed circuit
		Intermittent 3	Open circuit
		Intermittent 4	Open circuit
		Intermittent 5	Open circuit