Main light switch (11654), Exterior lamps, Illumination Lamps

Schematic

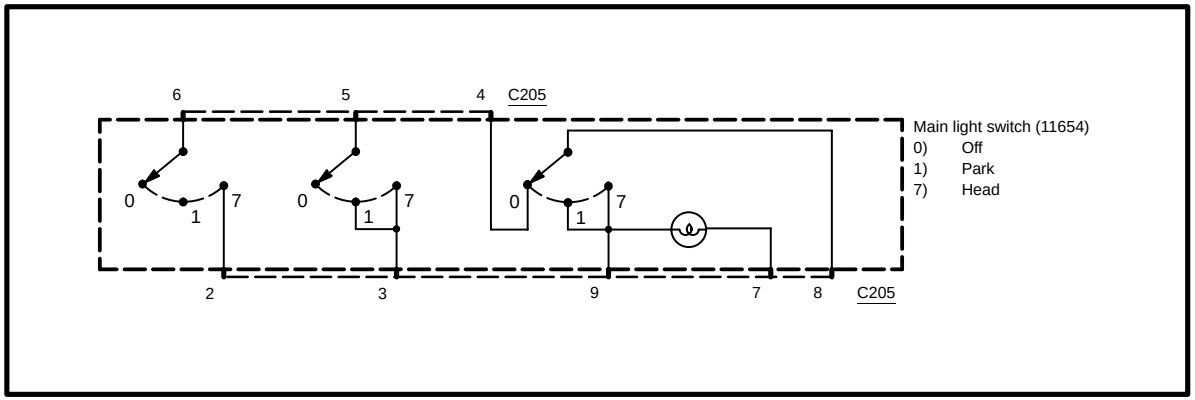

Terminals

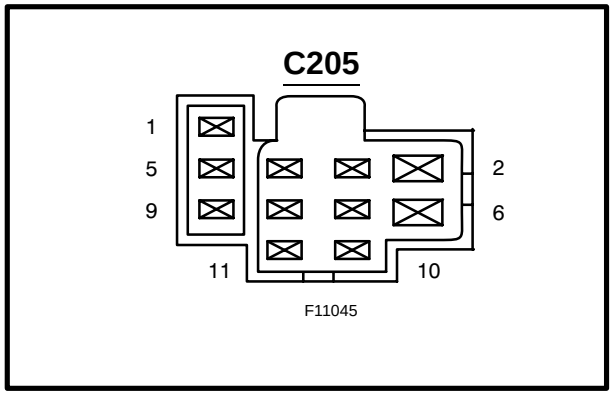

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Headlamp	6 and 2	Off	Open circuit
		Head	Closed circuit
		Park	Open circuit
Illumination Lamps	4 and 9	Off	Open circuit
		Head	Closed circuit
		Park	Closed circuit
Park lamps & Fog lamps	5 and 3	Off	Open circuit
		Head	Closed circuit
		Park	Closed circuit