C288

19D887

Heater blower motor
(19805)



F02025

Pin	Circuit	Circuit function
1	30S-FA18A (RD/BK)	Blower motor relay, switched power, output
2	31S-FA18 (BK/RD)	Heater blower motor (19805), control

C289

19D887

Fresh/recirculation
door actuator
(19E616)



F06128

Pin	Circuit	Circuit function
1	33-FB8 (YE/RD)	Fresh/recirculation door actuator (19E616) +/-
2	–	not used
3	8-FB8 (WH/RD)	Fresh/recirculation door actuator (19E616), signal
4	7-FB8 (YE/RD)	Reference voltage
5	9-FB8 (BN/RD)	Signal return
6	32-FB8 (WH/RD)	Fresh/recirculation door actuator (19E616) +/-

C290a (GY)

14401

Audio unit (18808)

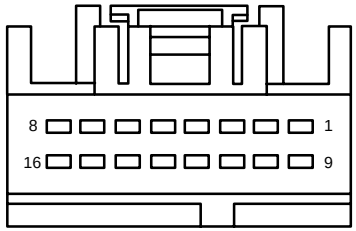

F16151

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	4-EA8 (GY/VT)	Audio corporate protocol A, not used
8	5-EA8 (BU/WH)	Audio corporate protocol B, not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used